

Objective

The series is an innovative range of professional recessed spotlights, created to deliver high lighting performance and excellent visual comfort, without forgetting about energy saving and "green" requirements. A complete, flexible product range, which is extremely versatile in its various applications, like shops, showrooms, restaurants, offices and supermarkets; this type of luminaire is studied to win the challenge of high lighting performance criteria in every place. Remspot has the option to be equipped with our LED module or lamp of Mr16 global standardization size.

Obiettivo

La serie è una gamma innovativa di faretto da incasso professionali, creati per offrire elevate prestazioni di illuminazione e un eccellente comfort visivo, senza dimenticare i requisiti di risparmio energetico e "verde". Una gamma di prodotti completa e flessibile, estremamente versatile nelle sue varie applicazioni, come negozi, showroom, ristoranti, uffici e supermercati; questo tipo di apparecchio è studiato per vincere la sfida di elevati criteri di prestazione illuminotecnica in ogni luogo. Remspot ha la possibilità di essere equipaggiato con il nostro modulo LED o lampada della dimensione di standardizzazione globale Mr16.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Optical PMMA Lens.















Reflector - White baffle glare reducer.



LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

CODE	WATTAGE	LUMEN	SIZE mm	
6086303	3W	177lm	Ø20.5 X 72 H	Ø18
6086305	5W	295lm	Ø28 X 72 H	Ø25



			
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C	Adjusting		
IP 44	UGR <19	SDCM 2.0/3.0	
		COMPLIANCE LM-79 TM-21 (M-80)	
PASEL ACROLED SYSTEM	COB	CRI >90	
	SELV		series wiring
			
A++	85-265V 50/60Hz		

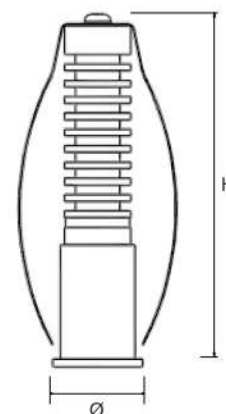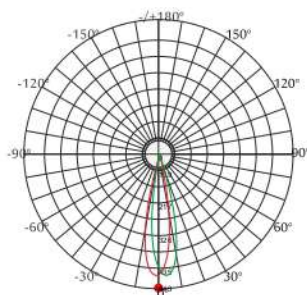

2700K
3000K
4000K
5000K

LED Drivers - PHILIPS GTI   TRIDONIC | LED Chips - BRIDGELUX  SHARP  PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.