

**Objective**

The high efficient LED system provides excellent result in luminous flux, light brightness, light uniformity and light pleasantness. Available in adjusting light option. Arcadia LED showcase light looks fabulous at valuable display case class or display box, shopping center, retail with its light that can optionally be used either side of for a beautiful framing effect.

**Obiettivo**

Il sistema LED ad alta efficienza fornisce risultati eccellenti in flusso luminoso, luminosità, uniformità e piacevolezza della luce. Disponibile nell'opzione di regolazione della luce. La luce per vetrina Arcadia a LED ha un aspetto favoloso in classe di vetrina o scatola di esposizione, centro commerciale, vendita al dettaglio con la sua luce che può essere opzionalmente utilizzata su entrambi i lati per un bellissimo effetto di inquadratura.

**Description**

**Housing** - Made of die cast aluminum powder coated with choice of RAL color

**Diffuser** - PMMA optical lens specially for LED




**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm
9401502	2W	200lm	Ø22X48X300H
9401504	4W	400lm	Ø28X48X300H
9401506	6W	600lm	Ø32X70X400H



55°C -25°C	<b>Glowing Wire</b> Test - 850°	
IP 44	IK 06	UGR <19
		SDCM 2.0/3.0
		<b>COMPLIANCE</b> LM-78 TM-21 LM-80
<b>PASEL</b> ACCREDITATION	COB	CRI >90
	SELV	
		series wiring
<b>A++</b>	85~265V	50/60Hz

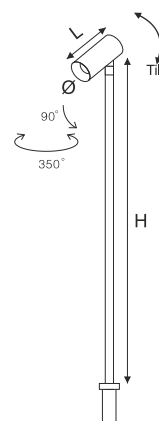

2700K  
3000K  
4000K  
5000K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.