

**Objective**

The classic elegant design of this spotlight is the result of very well prepared adjustable staff and an excellent raw materials choice. The aluminium heat sink is an insurance in a matter of safety. The finish, meticulously arranged till the last detail, is a warranty of beauty. The COB LED is specially chosen to provide high lumen results in uniform and pleasant light effect. The long working life helps to make the payback time shorter and to keep the maintenance needs at the minimum.

**Obiettivo**

Il design classico ed elegante di questo faretto da incasso è il risultato di uno staff molto ben preparato e di una scelta eccellente delle materie prime. Il dissipatore in alluminio è un'assicurazione in termini di sicurezza. La finitura, meticolosamente pianificata sino all'ultimo dettaglio, è una garanzia di bellezza. Il LED COB è specialmente selezionato per provvedere elevati risultati lumen in una luce uniforme e piacevole. La lunga vita di funzionamento del prodotto aiuta a ridurre il tempo di "ripago" dell'articolo ed a tenere la manutenzione a livelli minimi.

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors


**Diffuser** - Clear or frosted tempered glass.

**Reflector** - Pure anodized aluminum reflector.



















**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



**Standards** - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1




Adjustable function of inner trim.

CODE	WATTAGE	LUMEN	SIZE mm	
6075308	8W	960lm	103 X 103 X 73 H	Ø90
6075313	13W	1560lm	103 X 103 X 90 H	Ø90

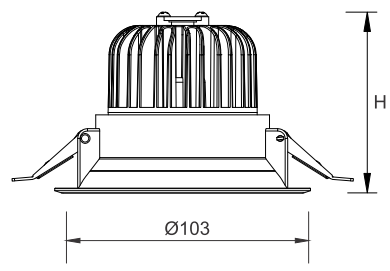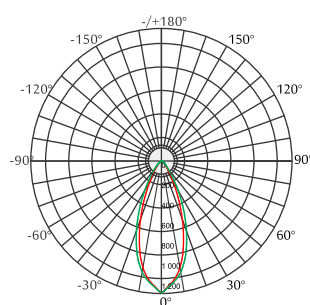

			
<b>PHASE DIMMING</b>		<b>1-10 DIMMING</b>	
	<b>55°C</b>	<b>Glowing Wire</b>	<b>Test - 850°</b>
<b>IP 44</b>		<b>UGR &lt;19</b>	<b>SDCM 2.0/3.0</b>
		<b>COMPLIANCE</b>	
<b>PASEL ACCREDITATION</b>	<b>COB</b>	<b>CRI &gt;90</b>	
	<b>SELV</b>		<b>series wiring</b>
			
<b>A++</b>	<b>85-265V 50/60Hz</b>		



	2700K	
	3000K	
	4000K	
	5000K	
	6000K	
	6500K	

LED Drivers - PHILIPS    TRIDONIC | LED Chips - BRIDGELUX    PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.