

Objective

Spott is an entry-level recessed spot range designed to replace halogen based luminaries. Its attractive price and high lumen per watt ratio make the decision to switch to LED an easy one. The luminaries compact design, with built-in driver, is suitable for a wide variety of applications. The imensions of the fixation hole meet the old halogen-based standard of 68 mm, which makes retrofitting possible. Thanks to the screw-in connectors, installation is easy and safe.

Obiettivo

Spott è una gamma di spot da incasso entry-level progettata per sostituire i luminari alogeni. Il suo prezzo interessante e l'elevato rapporto lumen per watt rendono la decisione di passare al LED semplice. Il design compatto degli apparecchi di illuminazione, con driver integrato, è adatto per un'ampia varietà di applicazioni. Le dimensioni del foro di fissaggio soddisfano il vecchio standard alogeno di 68 mm, che rende possibile il retrofit. Grazie ai connettori a vite, l'installazione è facile e sicura.

Description


Housing - Die cast aluminum powder coated with choice of RAL colors

Diffuser - Tempered clear glass with polycarbonate optical lens















Reflector - Anti glare aluminum reflector.




LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

| CODE | WATTAGE | LUMEN | SIZE mm |  |
|---------|---------|-------|-----------|---|
| 6090903 | 3W | 360lm | Ø45 X 33H | Ø38mm |
| 6090905 | 5W | 600lm | Ø45 X 64H | Ø38mm |
| 6090907 | 7W | 840lm | Ø45 X 64H | Ø38mm |



| | | | |
|---|---|---|---|
|  |  |  |  |
| PHASE DIMMING | DALI | 1-10 DIMMING |  |
| 55°C | Glowing Wire Test - 850° | | |
| -25°C | | | |
| IP 54 | Adjusting | UGR <19 | SDCM 2.0/3.0 |
|  |  | COMPLIANCE LM-79 TM-21 LM-80 | |
| PASEL ACCREDITATION | COB | CRI >90 |  |
|  | SELV |  | series wiring |
|  |  |  |  |
| A++ | 85~265V 50/60Hz | | |

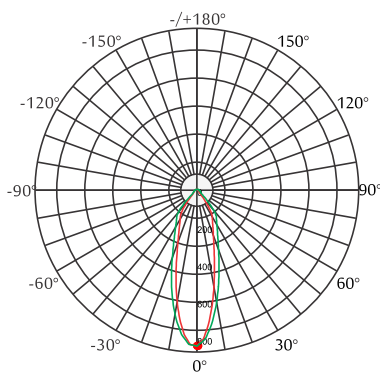

2700K
3000K
4000K
5000K
6000K
6500K



LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS  Micro HumanTech

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.