

Objective

Many version available with their own characteristics; this light was born as a projector, but can be surface mounted or even recessed in the ceiling. The purpose is to provide a projector with all its peculiarities even where the architectural characteristics don't permit that. The LED advanced system and the extremely high quality of its performance makes the luminaire purely efficient and very helpful in energy saving. The character of the design, determined and professional, is highlighted from the pure die-cast aluminium of the housing. The applications are bar, restaurants, museum, art galleries.

Obiettivo

Molte versioni disponibili, tutte con le proprie caratteristiche; questa luce è nata come proiettore, ma può essere montata in superficie oppure incassata nel soffitto. Lo scopo è di procurare un proiettore con tutte le sue peculiarità anche dove le caratteristiche architettoniche non lo consentono. Il sistema LED avanzato e l'altissima qualità delle sue prestazioni rende la luminaria puramente efficiente e di valido aiuto nel risparmio energetico. Il carattere del design, determinato e professionale, è evidenziato dal puro alluminio pressofuso del corpo. Gli impieghi sono bar, ristoranti, musei, gallerie d'arte.




Description

- Housing** - Die cast aluminium powder coated with choice of RAL colors
- Diffuser** - Polycarbonate clear diffuser.
- Reflector** - Anodized aluminum reflector.
- LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.
- Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm
5592820	20W	2000lm	Ø80 X 125 X 175H
5592825	25W	2500lm	Ø80 X 125 X 175H
5592830	30W	3000lm	Ø80 X 125 X 175H
5592835	35W	3500lm	Ø96 X 155 X 197H
5592840	40W	4000lm	Ø96 X 155 X 197H
5592850	50W	5000lm	Ø96 X 155 X 197H



LED	Energy Star	ECO	RoHS
12VDC Remote			
PHASE DIMMING	DALI	0-10 DIMMING	Adjustable
65°C	Glowing Wire Test - 850°		
-20°C	IP 44	IK 06	UGR <19
			SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 (lm-80)	
PASEL ACCREDITATION	COB	CRI >90	series wiring
RoHS	SELV	F	
CE	COMPLIANCE	U	
A++		85-265V 50/60Hz	

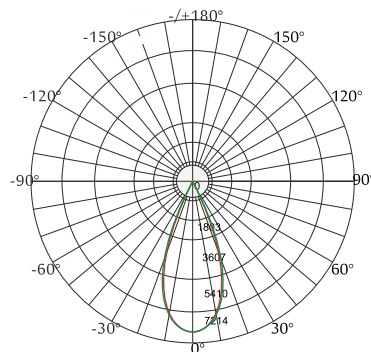

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTI | MEAN WELL | GTCI TRIDONIC | LED Chips - BRIDGELUX | CREE | SHARP | SAMSUNG | PHILIPS | CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.