

Objective

Introducing the groundbreaking collection of premium recessed spotlights - a testament to cutting-edge illumination. Crafted to offer unparalleled lighting prowess and unmatched visual serenity, while staying committed to energy efficiency and eco-conscious ideals. Our comprehensive and adaptable lineup stands as a beacon of versatility, finding its stride across a multitude of settings: from boutiques, galleries, and eateries to corporate hubs and retail emporiums. This luminary masterpiece is meticulously engineered to triumph over the demands of superior lighting performance in any environment. With Nera, the choice lies in your hands - opt for our advanced LED module or the universally embraced Mr16 lamp standard size, and usher in a new era of radiance.

Obiettivo

Presentiamo la rivoluzionaria collezione di faretti a incasso di alta gamma: una testimonianza dell'illuminazione all'avanguardia. Realizzata per offrire una potenza luminosa incomparabile e una serenità visiva senza pari, rimanendo fedeli all'efficienza energetica e agli ideali ecologici. La nostra completa ed adattabile gamma si erge come un faro di versatilità, trovando la sua strada in una moltitudine di ambienti: dalle boutique alle gallerie, dai ristoranti ai centri aziendali e agli empori del commercio al dettaglio. Questo capolavoro di illuminazione è meticolosamente progettato per trionfare sulle esigenze di una performance luminosa superiore in qualsiasi ambiente. Con Nera, la scelta è nelle tue mani: opta per il nostro avanzato modulo LED o per la dimensione standard universalmente accettata della lampada Mr16 e apri le porte a una nuova era di radiosità.

Description


Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Optical PMMA Lens.













Reflector - Black baffle glare reducer.

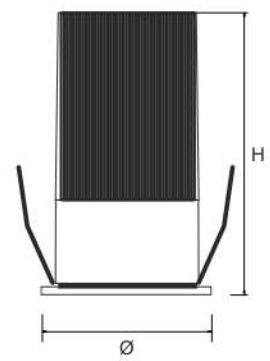
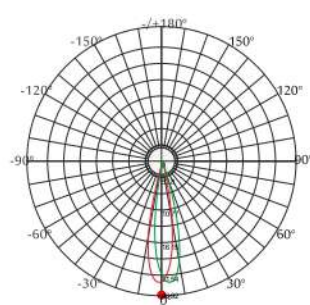
LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

CODE	WATTAGE	LUMEN	SIZE mm	
6086403	3W	261lm	Ø41 X 60 H	Ø35
6086408	8W	696lm	Ø52 X 74 H	Ø45
6086411	11W	957lm	Ø63 X 82 H	Ø55



			
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C	IP 65	UGR <17	SDCM 2.0/3.0
	Adjusting	COMPLIANCE	LM-79 TM-21 (M-80)
	EAC	CRI >90	
PASEL ACROLED MODULE	COB	SELV	series wiring
	RoHS		F
CE			U
A++	85-265V 50/60Hz		



	2700K	
	3000K	
	4000K	
	5000K	

LED Drivers - PHILIPS    TRIDONIC | LED Chips - BRIDGELUX  SHARP  PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.