

Objective

Square luminaire for installation in-ground-recessed ceiling recessed, ceiling suspended. Configuration: three sizes available. Die-cast aluminium structure and heat sink, EN AB-47100 alloy (low copper content). 316L high corrosion stainless steel outer frame. Glass diffuser: transparent with silkscreen border. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint.

Obiettivo

Apparecchio tondo per installazione a incasso nel soffitto da incasso a terra, soffitto sospeso. Configurazione: tre dimensioni disponibili. Struttura in alluminio pressofuso e dissipatore di calore, lega EN AB-47100 (basso contenuto di rame). Cornice esterna in acciaio inossidabile 316L. Diffusore in vetro: trasparente con bordo serigrafato. Rivestimento a doppio strato per un'elevata resistenza alla corrosione: i componenti in alluminio sono verniciati a doppio strato con polveri conformi agli standard QUALICOAT: un primo strato di polvere epossidica (con eccellente resistenza chimica e meccanica) e un secondo strato di finitura di polvere di poliestere (resistente ai raggi UV e agli agenti atmosferici). L'intero processo di verniciatura del raccordo in alluminio inizia da componenti che sono stati precedentemente sabbiati per rendere la superficie più porosa e aumentare l'aderenza della vernice.

Description

Housing - Made of high corrosion die cast aluminum with high corrosion stainless steel 316 trim cover. Sealed with silicon gasket rubber.

Diffuser - Tempered Glass diffuser specially for LED

Reflector - Specular anodized aluminum reflector

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.








Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

Accessories - Stainless steel chain for hanging, ceiling recessed clips, ground recessed PVC box, honeycomb, frosted glass for flood beam.

CODE	WATTAGE	LUMEN	SIZE mm	Ø
1106408	8W	1120lm	135 X 135 X 126H	125 X 125
1106412	12W	1680lm	185 X 185 X 153H	175 X 175
1106421	21W	2940lm	185 X 185 X 153H	175 X 175
1106417	17W	2380lm	215 X 215 X 173H	205 X 205
1106436	36W	5040lm	215 X 215 X 173H	205 X 205



- LED
- PHASE DIMMING
- IP 67
- IK 10
- UGR <21
- SDCM 2.0/3.0
- COMPLIANCE
- LM-79 TM-21
- LM-80
- PASEL ACCREDITATION
- COB
- CRI >90
- SELV
- series wiring
- CE
- COMPLIANCE
- 220-240V 50/60Hz
- A++
- ECO
- 1-10 DIMMING
- Glowing Wire Test - 850°
- IP 67
- IK 10
- UGR <21
- SDCM 2.0/3.0
- COMPLIANCE
- LM-79 TM-21
- LM-80
- PASEL ACCREDITATION
- COB
- CRI >90
- SELV
- series wiring
- CE
- COMPLIANCE
- 220-240V 50/60Hz
- A++

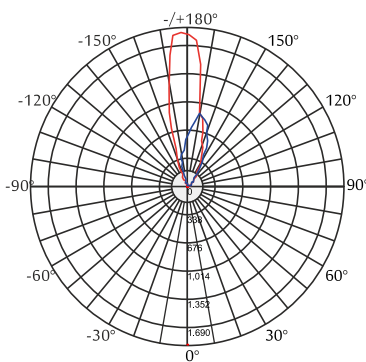

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.