

**Objective**

The high efficient LED system provides excellent result in luminous flux, light brightness, light uniformity and light pleasantness. Available in adjusting light option. Altalena LED showcase light looks fabulous at valuable display case class or display box, shopping center, retail with its light that can optionally be used either side of for a beautiful framing effect.


**Obiettivo**

Il sistema LED ad alta efficienza fornisce risultati eccellenti in flusso luminoso, luminosità, uniformità e piacevolezza della luce. Disponibile nell'opzione di regolazione della luce. La luce per vetrina Altalena a LED ha un aspetto favoloso in classe di vetrina o scatola di esposizione, centro commerciale, vendita al dettaglio con la sua luce che può essere opzionalmente utilizzata su entrambi i lati per un bellissimo effetto di inquadratura.


**Description**

- Housing** - Made of die cast aluminum powder coated with choice of RAL color
- Diffuser** - PMMA optical lens specially for LED
- LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.
- Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm
9401202	2W	240lm	24 X 60 X 300H

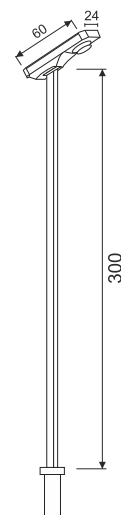

55°C -25°C	<b>Glowing Wire</b> Test - 850°	
IP 44	IK 06	UGR <19
		SDCM 2.0/3.0
		<b>COMPLIANCE</b> LM-78 TM-21 LM-80
PASEL ACCREDITATION	COB	CRI >90
	SELV	series wiring
<b>A++</b>	85~265V 50/60Hz	



- 2700K
- 3000K
- 4000K
- 5000K
- 6000K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.