

Objective


Extremely elegant & practical design in one size keeping the thinness. The main application that this product can fit in many cutout so you can apply to replace the majority of traditional conventional recessed products. Down light is equipped by high quality and built-in extractable driver. The attention to the last detail is here, in this item, which is well distinguishing from all the others thanks to its peculiarity and its charm. The energy savings, the low consumption, the short payback, the reasonable final price all included here. One product one size with multi lumen output and new function of Trio CCT when you select color temperature you want by pin adjustment.

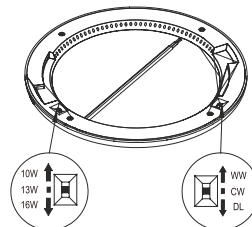
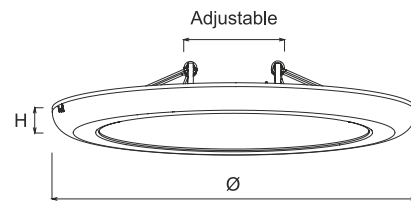
Obiettivo







Design estremamente elegante e pratico in taglia unica mantenendo la magrezza. L'applicazione principale che questo prodotto può contenere in molti ritagli in modo da poter applicare per sostituire la maggior parte dei tradizionali prodotti da incasso convenzionali. Il downlight è dotato di driver estraibile incorporato di alta qualità. L'attenzione all'ultimo dettaglio è qui, in questo articolo, che si distingue bene da tutti gli altri grazie alla sua peculiarità e al suo fascino. I risparmi energetici, i bassi consumi, il breve rimborso, il ragionevole prezzo finale tutto incluso qui. Un prodotto taglia unica con emissione di lumen multi nuova funzione di Trio CCT quando si seleziona la temperatura di colore desiderata mediante la regolazione dei pin.

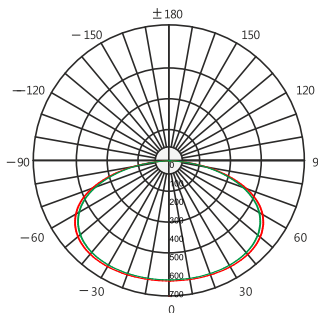
Description

- Housing** - Die cast aluminium powder coated with choice of RAL colors
- Diffuser** - Opal polycarbonate PMMA diffuser.
- LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.
- Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE [D x H]	
	10W	1100lm		
5081010	13W	1430lm	Ø235 X 16 H	Ø65 ~ Ø205
	16W	1760lm		



ADJUSTABLE CUTOUT	TRIO WATT	
PHASE DIMMING	DALI	1-10 DIMMING
55°C	Glowing Wire Test - 850°	
-25°C	IP 44	UGR <19
		SDCM 2.0/3.0
PASEL ACCREDITATION	SMD	COMPLIANCE LM-78 TM-21
	SELV	CRI >90
		series wiring
A++	85~265V	50/60Hz



TRIO
3000K
4000K
6000K

