

**Objective**

Owing to our years of experience, we are able to offer the Abruzzo line of in-ground light. Superior quality raw material and high edge machines are used in the manufacturing process. The products here offered are in strict compliance with the global quality standards. This products are acknowledge for their features like shock resistance, rust proof and durability, all in the small size.

**Obiettivo**

Grazie alla nostra esperienza pluriennale, siamo in grado di offrire la linea di luci incassate a pavimento Abruzzo. Nel processo di produzione vengono utilizzate materie prime di qualità superiore e macchine di alto livello. I prodotti qui offerti sono in stretta conformità con gli standard di qualità globali. Questi prodotti sono riconosciuti per le loro caratteristiche come resistenza agli urti, resistenza alla ruggine e durata, il tutto nella piccola dimensione.

**Description**

**Housing** - Made of high corrosion die cast aluminum with high corrosion stainless steel


316 trim cover, sealed with silicon gasket rubber.

**Diffuser** - Tempered glass diffuser specially for LED with PMMA optical lens or frosted glass.










**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1

**Accessories** - PVC cover box.



| CODE    | WATTAGE | LUMEN | SIZE mm  |  |
|---------|---------|-------|----------|--|
| 1103203 | 3W      | 360lm | Ø75X115H | Ø65  |



|   |   |   |
|---|---|---|
|  |  |  |
| 65°C  | Glowing Wire Test - 850°  |   |
| -20°C   | IP 67   | IK 10   |
|   | UGR <21   | SDCM 2.0/3.0  |
|  |  | COMPLIANCE LM-79 TM-21 (LF-80)  |
| PASEL ACCREDITATION   | COB   | CRI >90   |
|  | SELV  | series wiring   |
|  |  |  |
| <b>A++</b>  | 100~240V 50/60Hz  |   |

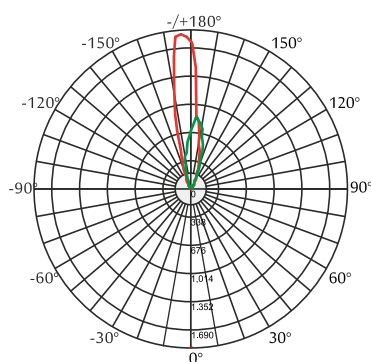

1500 KG LOAD

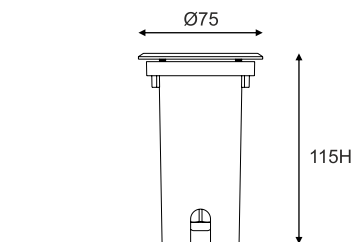

2700K  
3000K  
4000K  
5000K  
6000K



LED Drivers - PHILIPS    TRIDONIC | LED Chips - BRIDGELUX    PHILIPS  Micro HumanTech

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.