

Objective

Special modern design and high quality finishing till the very last detail, for an adjustable and professional wall light. The movement freedom of the product permits to orient the light beam in the most liked direction and then to create different light effects, especially if we have in our wall more than one product of this type. The high quality LED ensures long life span and energy savings.

Obiettivo

Design moderno speciale ed alta qualità di rifinitura fino all'ultimo più piccolo dettaglio, per una lampada da muro orientabile. La libertà di movimento del prodotto permette di orientare il fascio di luce nella posizione che più piace e quindi di creare differenti effetti di luce, specialmente se si ha sulla propria parete più di un prodotto di questo tipo. L'alta qualità del LED assicura lunga vita del prodotto e risparmio energetico.

Description

Housing - Made of die cast aluminum powder coated with choice of RAL color

Diffuser - PMMA Glass optical lens




LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm
1610603	3W	345lm	131 X 102 X 66H



Adjustable	ENERGY STAR	ECO
55°C	Glowing Wire Test - 850°	
-25°C	IP 65	IK 07
	UGR <21	SDCM 2.0/3.0
		COMPLIANCE LM-79 TM-21 LM-80
	SMD	CRI >90
	SELV	series wiring
	185-265V 50/60Hz	

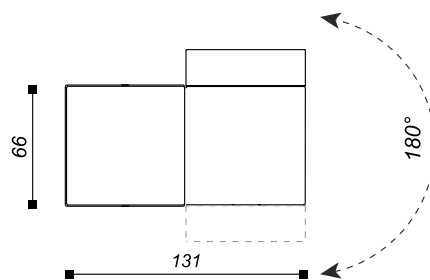

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.