

Objective

Minimal design a small size with movement freedom, plus an high efficient LED chip, which ensure high brightness with uniform and homogeneous light while saving energy and costs. The item is available in black or white finish, in three different options: track installation, ceiling recessed installation, ceiling surface installation. The purpose of many installation options is to permit to have a projector, with all its characteristics and advantages, wherever we have diminished spaces or whenever the client simply doesn't like the track system.

Obiettivo

Design minimalista e taglia piccola con libertà di movimento, più il chip LED ad alta efficienza, che assicura elevata luminosità con luce uniforme ed omogenea risparmiando allo stesso tempo energia e costi. L'articolo è disponibile in rivestimento bianco o nero, in tre opzioni differenti: installazione su guida/binario, incasso su soffitto, superficiale su soffitto. Lo scopo dei vari tipi di installazione è di permettere di avere un proiettore, con tutte le sue caratteristiche ed i suoi vantaggi, ovunque si trovino spazi ridotti o nel caso al cliente semplicemente non piaccia il sistema a guida/binario.

Description

Housing - Die cast aluminium with PVC coated with choice of RAL colors


Diffuser - Optical PMMA lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



















Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1




Adjusting and rotating function of fixture head.

Color - White, Satin, Silver

CODE	WATTAGE	LUMEN	SIZE mm	
6096112	12W	1320lm	Ø85 X 100 H	Ø80
6096124	24W	2640lm	Ø135 X 105 H	Ø128



			
PHASE DIMMING		1-10 DIMMING	
	55°C	Glowing Wire Test - 850°	
IP 44		UGR <19	SDCM 2.0/3.0
	EAC	COMPLIANCE	
PASEL ACCREDITATION	COB	CRI >90	
	SELV		series wiring
			
A++	85~265V 50/60Hz		

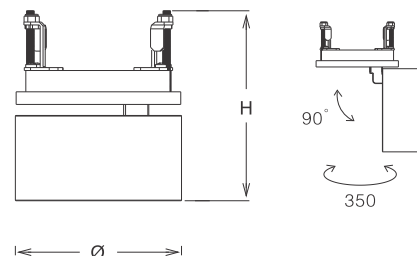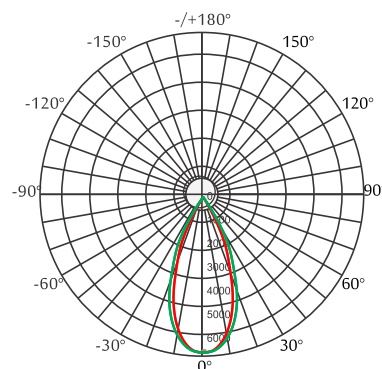

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS    TRIDONIC  CREE  SAMSUNG  CITIZEN 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.