

**Objective**

Recessed movable track light was born as a projector, but can be surface mounted or even recessed in the ceiling. The purpose is to provide a projector with all its peculiarities even where the architectural characteristics don't permit that. The LED advanced system and the extremely high quality of its performance makes the luminaire purely efficient and very helpful in energy saving. The character of the design, determined and professional, is highlighted from the pure die-cast aluminium of the housing. The applications are bar, restaurants, museum, art galleries. This option is a pull-out spotlight for indoor applications.

**Obiettivo**

Binario mobile ad incasso luce è nata come proiettore, ma può essere montata in superficie oppure incassata nel soffitto. Lo scopo è di procurare un proiettore con tutte le sue peculiarità anche dove le caratteristiche architettonici non lo consentono. Il sistema LED avanzato è l'estrema qualità delle sue prestazioni rende la luminaria puramente efficiente e di valido aiuto nel risparmio energetico. Il carattere del design, determinato e professionale, è evidenziato dal puro alluminio pressofuso del corpo. Gli impieghi sono bar, ristoranti, musei, gallerie d'arte. Questa versione è un proiettore da incasso a scomparsa.

**Description**


**Housing** - Die cast aluminium with solvent free PVC coated with choice of RAL colors

**Diffuser** - PMMA optical lens diffuser.













**Reflector** - Pure anodized aluminum reflector.


**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm	
5081339	3X13W	3900lm	322 X 322 X 122H	267X267



		Frameless	
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C	Adjustable		
IP 40	UGR <19	SDCM 2.0/3.0	
		COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	COB	CRI >90	
	SELV		series wiring
			
<b>A++</b>	85~265V 50/60Hz		

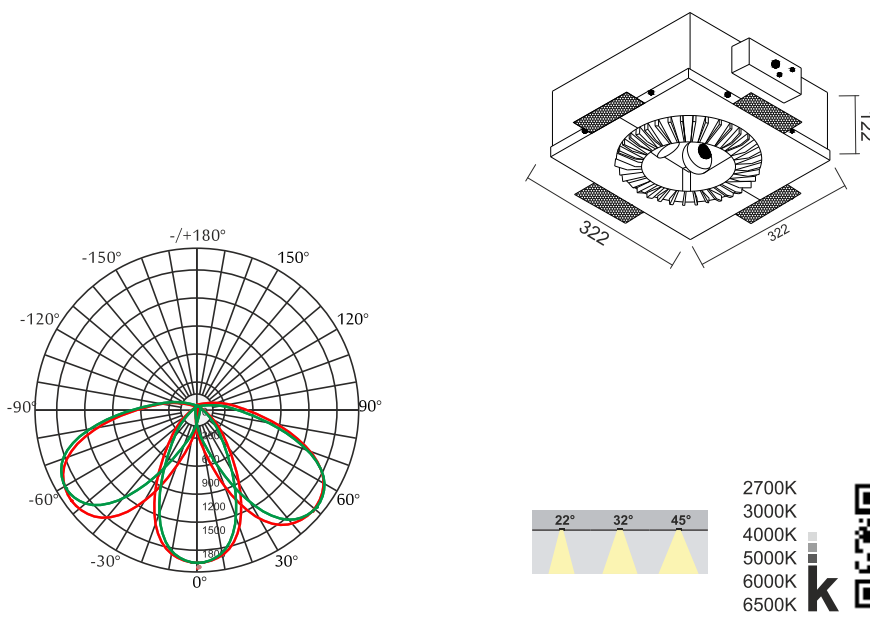

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS  CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.