

Objective

All the Lira family wears the signature of quality and beauty of a regnant in the spotlights world. Adjustable or fixed as available in a choice of options in a matter of design and power, plus the chance to more than easily replace the LED source with another one, same or different it will be. This item is pure functionality and adaptable to every requirement. The high efficiency of the LED source ensures excellent performances and low consumption. Energy and economy savings are a little advantage compared to the design of this item, which makes technicians and artists in love with it.

Obiettivo

Tutta la famiglia Lira indossa la firma della qualità e della bellezza di un regnante nel mondo dei riflettori. Regolabile o fisso come disponibile in una scelta di opzioni in una questione di design e potenza, oltre alla possibilità di sostituire più facilmente la sorgente LED con un'altra, uguale o diversa sarà. Questo articolo è pura funzionalità e adattabile ad ogni esigenza. L'elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. I risparmi di energia ed economia sono un piccolo vantaggio rispetto al design di questo articolo, che rende innamorati tecnici e artisti.

Description

Housing - Die cast aluminum powder coated with choice of RAL colors

Diffuser - Tempered clear glass or polycarbonate

Reflector - Anti glare aluminum reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722



Color - White, Black

Accessories - Honeycomb

CODE	WATTAGE	LUMEN	SIZE mm	Ø	Icon
6084203	3W	360lm	Ø35 X 43H	Ø30mm	✱
6084206	6W	720lm	Ø35 X 43H	Ø30mm	
6084303	3W	360lm	Ø45 X 50H	Ø40mm	✱
6084306	6W	720lm	Ø45 X 50H	Ø40mm	



GROUP DIMMING	LED	ENERGY STAR	MEAN WELL
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C	IP 44	ECO	UGR <19
			SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	COB	CRI >90	series wiring
ROHS	SELV	F	
CE	COMPLIANCE	RECYCLE	U
A++		85-265V 50/60Hz	

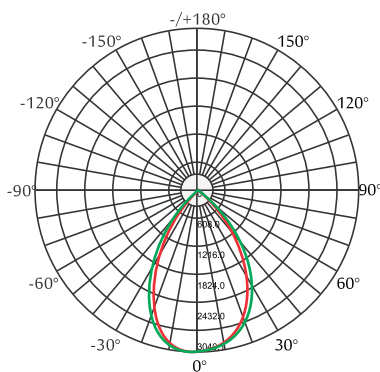

24°	36°	48°	
2700K			
3000K			
4000K			
5000K			
6000K			
6500K			

LED Drivers - PHILIPS **GTI** **MEAN WELL** **ATCI TRIDONIC** LED Chips - BRIDGELUX **CREE** **SHARP** **SAMSUNG** **PHILIPS** **CITIZEN**

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.