

**Objective**

This LED flood light emits a wide beam of cool, natural, or warm white illumination for landscape lighting and parking lighting. The powerful high efficient LED system emits up to 11,500 lumens for ample outdoor illumination and operates, at the same time, saving energy. The weatherproof light source housing is constructed of heavy-duty die cast aluminium with an integral heat sink and a tempered glass lens. An adjustable mounting bracket allows you to direct illumination where it's needed.

**Obiettivo**

Questa luce di inondazione a LED emette un ampio raggio di illuminazione in freddo, naturale o caldo bianco per l'illuminazione del paesaggio e l'illuminazione di parcheggio. Il potente sistema LED ad alta efficienza emette fino a 11.000 lumen per un'ampia illuminazione esterna e funziona, allo stesso tempo, risparmiando energia. L'alloggiamento della sorgente di luce a prova di intemperie è costruito in alluminio pressofuso resistente con un dissipatore di calore integrato e una lente in vetro temperato. Una staffa di montaggio regolabile consente di dirigere l'illuminazione dove è necessario.

**Description**

**Housing** - Made of dia cast aluminum powder coated with choice of RAL color.

High corrosion aluminium body with stainless steel screw in additional with rubber silicon gasket.

**Diffuser** - Tempered clear glass diffuser specially for LED with optical PMMA lens.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.




**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1

**Accessories** - Mounting brackets.


CODE	WATTAGE	LUMEN	SIZE mm
2142260	60W	6900lm	235 X 66 X 386 H
21422100	100W	11500lm	235 X 66 X 386 H



LED	ENERGY STAR	ECO
PHASE DIMMING	DALI	1-10 DIMMING
65°C	Glowing Wire	Test - 850°
-20°C		
IP 66	IK 10	UGR <21
		SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE
		LM-79 TM-21
PASEL ACCREDITATION	SMD	CRI >90
		series wiring
ROHS	SELV	F
		series wiring
CE	COMPLIANCE	U
A++	85-265V	50/60Hz

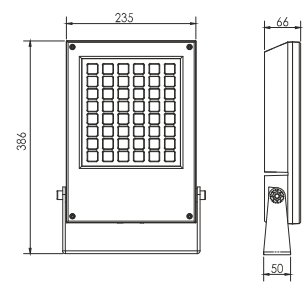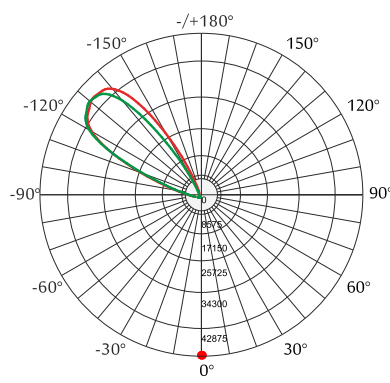

Bracket



- RGB
- 2700K
  - 3000K
  - 4000K
  - 5000K
  - 6000K
  - 6500K



LED Drivers - PHILIPS GTCI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.