

Objective

Nowadays when we are going to choose a product we have to look as much as the economical issue as much as the human resources. That's why we have to think about energy savings as a priority. That's why we have to study how the light can affect the health and the work attitude of the employees, or the mood and the consecutive inclination to buy of a customer. Imola is the perfect balance between efficiency, performance and comfortable relaxing light effect results. Wide beam angle and no glare effect, thanks to the deep position of the light source.

Obiettivo

Oggi giorno quando stiamo per scegliere un prodotto dobbiamo guardare tanto al discorso economico quanto alle risorse umane. Ecco il perchè dobbiamo pensare al risparmio energetico come una priorità. Ecco perchè dobbiamo studiare come la luce può influenzare la salute e il responso lavorativo di un impiegato, oppure l'umore e la conseguente propensione all'acquisto di un cliente. Imola è il perfetto equilibrio tra efficienza, resa e un confortevole e rilassante effetto di luce. Ampio fascio di luce e nessun effetto abbagliamento, grazie alla posizione incassata della sorgente di luce.

Description

Housing - Die cast aluminium with PVC coated with choice of RAL colors

Diffuser - Clear tempered glass lamp or optical lens diffuser.

Reflector - Pure anodized aluminum reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.




Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

Color - White, Black, Silver

CODE	WATTAGE	LUMEN	SIZE mm	
6095507	7W	840lm	94 X 94 X 63 H	85 X 85
6095509	9W	1080lm	94 X 94 X 63 H	85 X 85
6095512	12W	1440lm	94 X 94 X 63 H	85 X 85
6095515	15W	1800lm	94 X 94 X 63 H	85 X 85



LED			
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C	IP 65	ECO	UGR <19
	EAC	COMPLIANCE LM-79 TM-21 (lm-80)	
PASEL ACCREDITATION	COB	CRI >90	
ROHS	SELV	F	series wiring
CE	COMPLIANCE		U
A++		85-265V 50/60Hz	

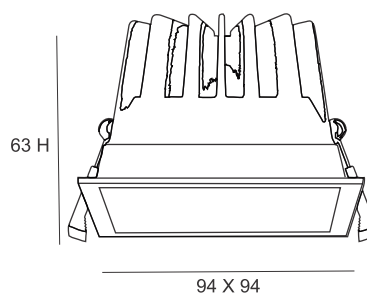

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.