

**Objective**

All the Tilt family wears the signature of quality and beauty of a regnant in the spotlights world. Available in a choice of options in a matter of design and power, plus the chance to more than easily replace the LED source with another one, same or different it will be. This item is pure functionality and adaptable to every requirement. The high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item, which makes technicians and artists in love with it.

**Obiettivo**

Tutta la famiglia Tilt porta la firma della qualità ed eleganza di un regnante nel mondo dei faretti da incasso. Disponibile in una scelta di opzioni per quanto concerne il design e la potenza, più l'opportunità di sostituire più che facilmente la sorgente LED con un'altra, sia essa uguale o differente. Questo articolo è pura funzionalità ed adattabile per ogni esigenza. La sorgente LED ad alta efficienza assicura eccellenti performance e bassi consumi. risparmio energetico ed economico sono niente più che un piccolo vantaggio se comparati al design di questo prodotto, che si fa amare sia dai tecnici che dagli artisti.

**Description**

**Housing** - Die cast aluminum powder coated with choice of RAL colors


**Diffuser** - Tempered clear glass optical lens.

**Reflector** - Anti glare ring reflector.


















**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

**Reflector Color** - White, Bronze, Black, Silver.

CODE	WATTAGE	LUMEN	SIZE mm	
6088606	6W	720lm	Ø96 X 74H	Ø82mm
6088608	8W	960lm	Ø96 X 106H	Ø82mm



			
<b>PHASE DIMMING</b>	<b>DALI</b>	<b>1-10 DIMMING</b>	
	<b>55°C</b>	<b>Glowing Wire Test - 850°</b>	
<b>IP 40</b>		<b>UGR &lt;19</b>	<b>SDCM 2.0/3.0</b>
	<b>EAC</b>	<b>COMPLIANCE</b>	
<b>PASEL ACCREDITATION</b>	<b>COB</b>	<b>CRI &gt;90</b>	
	<b>SELV</b>		<b>series wiring</b>
			
<b>A++</b>	<b>85~265V 50/60Hz</b>		

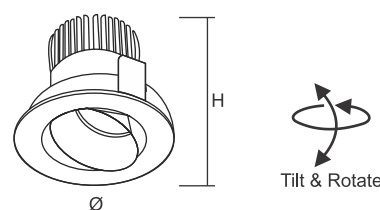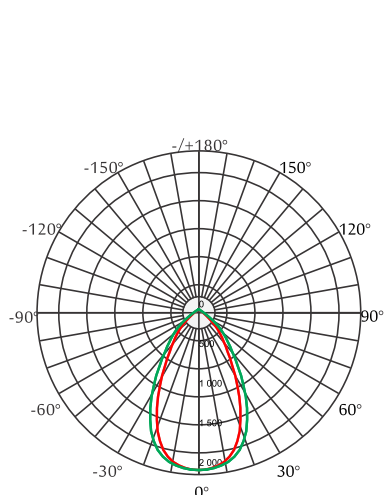

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.