

Objective

Sicilia aggressive inground fixture ideal application for Floor ceiling recessed luminaire intended for use with monochromatic and LED and RGBW light sources (24v version or 220-240v (50-60 Hz) comparability with DMX512, DALI, Comprising body, Die Cast aluminium body and flush end caps in die-cast zamak complete with silicone gaskets. Liquid acrylic paint ensuring high resistance to atmospheric agents and UV rays. Optical compartment closed at the top by a 8mm thick transparent glass screen product can be with glare filter honey comb. Wall-grazing Spot light distribution optics Wall grazing As spot, medium, flood.

Obiettivo

Sicilia Apparecchio da incasso aggressivo ideale per apparecchi da incasso a soffitto Floor destinati all'uso con sorgenti luminose monocromatiche e LED e RGBW (versione 24v o 220-240v (50-60 Hz) comparabili con DMX512, DALI, corpo comprendente, corpo in alluminio pressofuso e filo testate di chiusura in zama pressofusa completa di guarnizioni in silicone Vernice acrilica liquida che garantisce un'elevata resistenza agli agenti atmosferici e ai raggi UV. Vano ottico chiuso nella parte superiore da uno schermo in vetro trasparente di spessore 8mm può essere con filtro antiabbagliante a nido d'ape. Ottica di distribuzione della luce spot Pascolo a parete Come spot, medium, flood.

Description

Housing - Made of high corrosion die cast aluminum with high corrosion stainless steel 316 trim cover, sealed with silicon gasket rubber.

Diffuser - Clear or frosted tempered Glass diffuser specially for LED with PMMA optical lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

Accessories- Recessed aluminium box, 1m wire length, honeycomb.

CODE	WATTAGE	LUMEN	SIZE mm	
1104003	3W	345lm	200 X 63 X 76H	191 X 57
1104006	6W	690lm	300 X 63 X 76H	291 X 57
1104012	12W	1380lm	500 X 63 X 76H	491 X 57
1104024	24W	2760lm	1000 X 63 X 76H	991 X 57
1104036	36W	4140lm	1000 X 90 X 105H	990 X 78



PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C	IP 67	IK 10	UGR <21
	SDCM 2.0/3.0	COMPLIANCE LM-79 TM-21 LM-80	
		CRI >90	
PASEL ACCREDITATION	SMD		series wiring
	SELV		
	DC 24V	220-240V 50/60Hz	

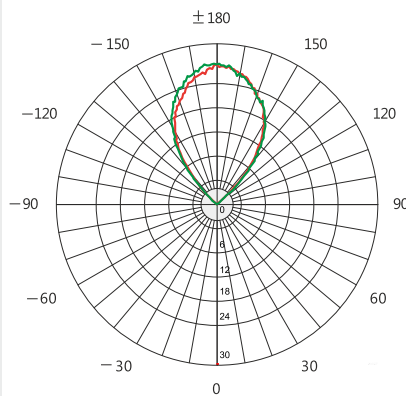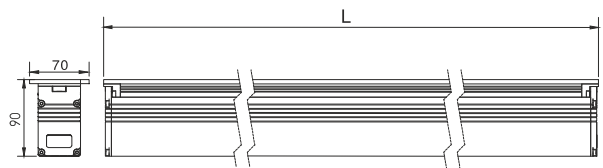

2500 KG LOAD

X RGB
 RGBW
 SINGLE
 2700K
 3000K
 4000K
 5000K
 6000K

LED Drivers - PHILIPS GTCI TRIDONIC | LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.