

**Objective**

Suitable for streets, parking lots, walking/hiking paths, common areas, camping areas, beach areas, pools, parks, bus stop, etcetera. Especially this light is suitable wherever there is a need to lighting up without the high cost of the electricity. The energy saving is important especially in this category of luminaire, and our Manzoni matches exactly all the requirements in this field. The advanced LED technology provides high quality result with a guaranteed high luminous flux and a pleasant, comfortable, homogeneous light effect.

**Obiettivo**

Adatto per strade, parcheggi, percorsi pedonali / escursionistici, aree comuni, aree di campeggio, aree di spiaggia, piscine, parchi, fermate degli autobus, eccetera. Soprattutto questa luce è adatta ovunque ci sia la necessità di illuminare senza l'alto costo dell'elettricità. Il risparmio energetico è importante soprattutto in questa categoria di apparecchi, e il nostro Manzoni soddisfa esattamente tutte le esigenze in questo campo. L'avanzata tecnologia LED garantisce risultati di alta qualità con un flusso luminoso elevato e un effetto luce piacevole, confortevole ed omogeneo.

**Description**

**Housing** - Made of dia cast aluminum with choice of RAL color corrosion & salt resistance polyester coating.

**Diffuser** - Tempered clear glass with Optical PMMA lens high resistance to temperature and UV radiation.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.





**Standards** - manufactured in accordance with EN 61643-11

**Accessories** - Surge protection device up 10KV, (OTP) Automatic temperature control device in events of unexpected LED temperature rised.

CODE	WATTAGE	LUMEN	SIZE mm
13364080	80W	10800lm	375 X 776 X 134H
13364110	110W	14850lm	375 X 776 X 134H
13364150	150W	20250lm	375 X 872 X 134H
13364180	180W	24300lm	375 X 872 X 134H
13364200	200W	27000lm	375 X 872 X 134H



LED	ENERGY STAR	ECO
PHASE DIMMING	DALI	1-10 DIMMING
65°C	Glowing Wire Test - 850°	
-20°C		
IP 65	IK 10	UGR <22
		SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80
PASEL ACCREDITATION	SMD	CRI >90
ROHS	SELV	series wiring
CE	COMPLIANCE	U
<b>A++</b>		220-265V 50/60Hz

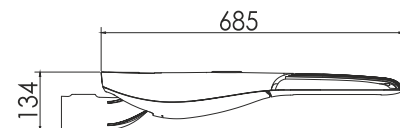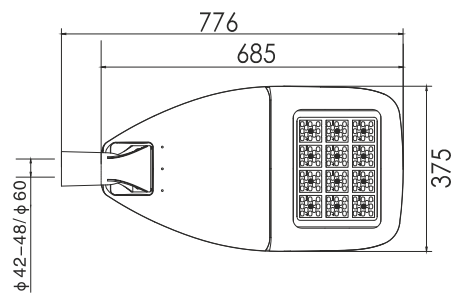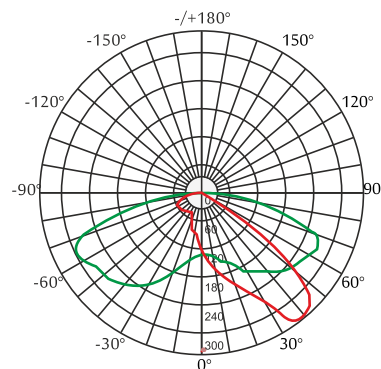

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTI | MEAN WELL | GTCI TRIDONIC | LED Chips - BRIDGELUX | CREE | SHARP | SAMSUNG | PHILIPS | CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.