

**Objective**

This LED sports lights are an energy-efficient solution for architectural lighting, garden lighting, outdoor accent lighting, sport zone, sports hall and sign lighting. This item proposed from the experience of Roma Luce team is a warranty in a matter of lumen performances, energy saving, long working lifespan and stylish. The light source is a high efficiency and advanced technology LED system. The housing material is extruded aluminium with anti-corrosion and weatherproof features.

**Obiettivo**

Le luci a LED di questo tipo sono una soluzione efficiente dal punto di vista energetico per l'illuminazione architettonica, l'illuminazione da giardino, l'illuminazione d'accento esterna, l'illuminazione degli alberi e l'illuminazione dei segnali. Questo articolo proposto dall'esperienza del team di Roma Luce è una garanzia in termini di prestazioni lumen, risparmio energetico, durata della vita lavorativa e stile. La sorgente luminosa è un sistema LED ad alta efficienza e tecnologia avanzata. Il materiale di alloggiamento è in alluminio estruso con caratteristiche anticorrosione e di resistenza alle intemperie.

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.

High corrosion aluminium body with stainless steel screw in additional with rubber silicon gasket supplied.



**Diffuser** - Tempered clear glass diffuser specially for LED with optical PMMA Lens.

**LED** - reducing energy consumption with L80/B10/F10 100,000 hrs lifetime.

**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1

**Accessories** - Mounting bracket, pole mounting adaptor, clamp bracket.

CODE	WATTAGE	LUMEN	SIZE mm
2151540	40W	4800lm	240 X 69 X 300 H
2151550	50W	6000lm	240 X 69 X 300 H
2151560	60W	7200lm	240 X 69 X 300 H
2151580	80W	9600lm	295 X 71 X 335 H
21515100	100W	12000lm	295 X 71 X 335 H
21515120	120W	14400lm	320 X 75 X 375 H
21515150	150W	18000lm	320 X 75 X 375 H
21515180	180W	21600lm	345 X 78 X 400 H
21515200	200W	24000lm	345 X 78 X 400 H
21515240	240W	28800lm	410 X 83 X 464 H
21515300	300W	36000lm	410 X 83 X 464 H

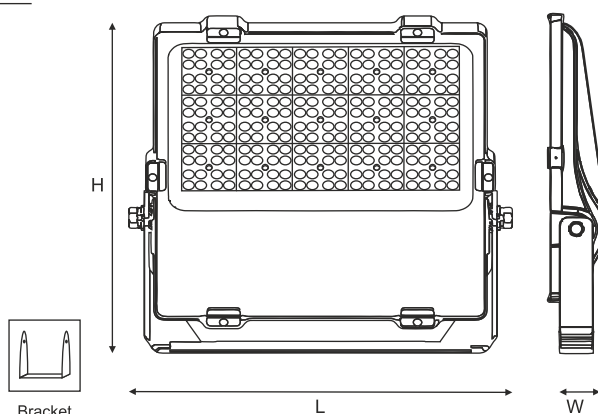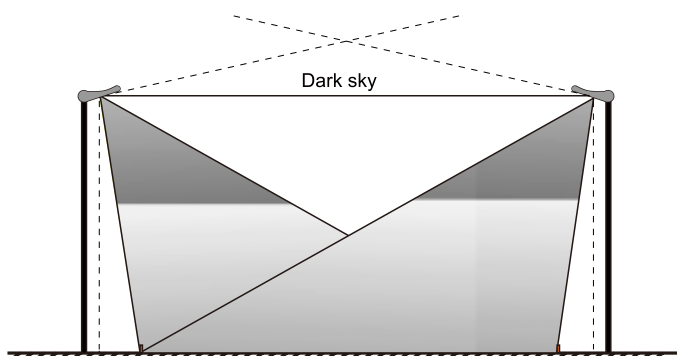




Pole mounting-42mm adaptor



Pole mounting-76mm adaptor




Pole mounting-60mm adaptor

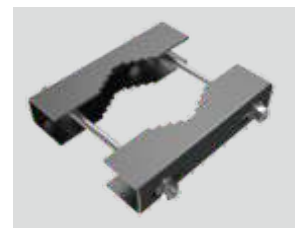

Clamp bracket

LED	ENERGY STAR	ECO	
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C	IP 66	IK 09	UGR <21
			SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-78 TM-21 (LM-80)	
PASEL ACCREDITATION	SMD	CRI >90	
RoHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++		85~265V 50/60Hz	

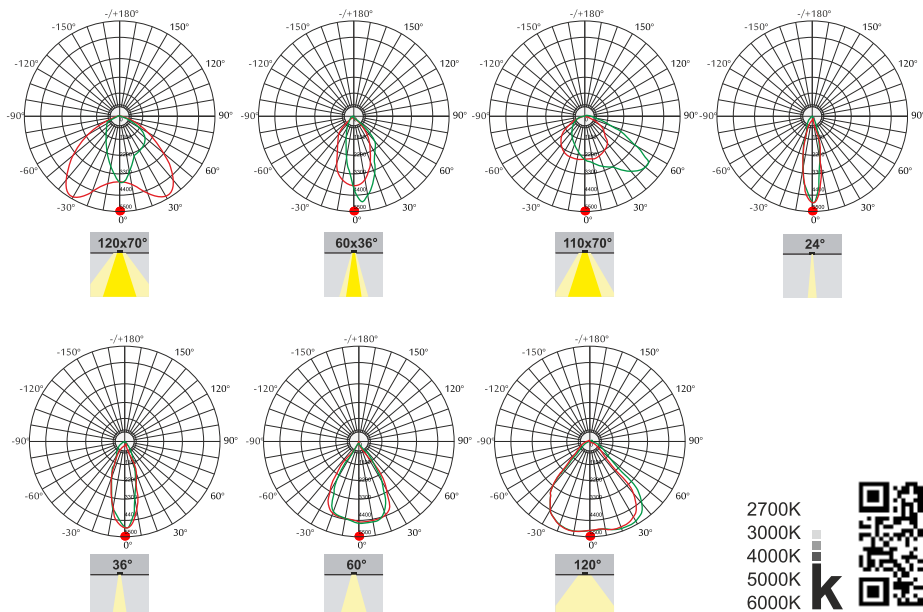

2700K  
3000K  
4000K  
5000K  
6000K



LED Drivers - PHILIPS GTI MEAN WELL TPCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.