

Objective

The most little one in its category, Babe, anyway equipped with the most advanced LED technology to match even the strict requirements, is the quintessential accent light. Suitable for exhibition area, shop windows, private rooms. The item delivers a professional results with its high luminous flux and the light emitted is natural, homogeneous and comfortable.

Obiettivo

La più piccola della sua categoria, Babe, comunque equipaggiata della più avanzata tecnologia LED per soddisfare anche le più rigorose esigenze, è la luce "d'accento" per antonomasia. Indicata per le aree di esposizione, le vetrine, le stanze private. L'articolo emette un risultato professionale con l'elevato flusso luminoso e la luce che ne risulta è naturale, omogenea e confortevole.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Clear tempered glass or optical PMMA lens.

Reflector - Pure anodized aluminum reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.




Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

Color - White, Satin, Silver

CODE	WATTAGE	LUMEN	SIZE mm		
6096503	3W	330lm	Ø36 X 54H	Ø30	
6096505	6W	660lm	Ø36 X 54H	Ø30	



PHASE DIMMING	DALI	1-10 DIMMING	GROUP DIMMING
55°C	Glowing Wire Test - 850°		
-25°C	IP 54	UGR <19	SDCM 2.0/3.0
		COMPLIANCE LM-79 TM-21 LM-80	
		COB	CRI >90
		series wiring	
A++	85~265V 50/60Hz		

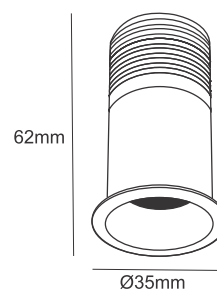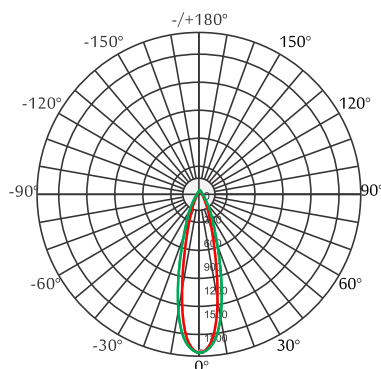

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.