

Objective

Locanda Family has many different models, but they all have one thing in common: its quite small tubular shape or round circle shape is what defines this range of lighting fixtures. Whether in single-use or accompanied by another cylinder or decorative light to make it directional lighting effect or reading light flux, this one is always a beauty. As a surface mounted or Simi recessed on the wall for some range of the family Locanda comes in many playful finishing colors. To complete the range, also wall-mounted versions are available high-efficiency low consumption of power applicable to modification of details to match customer requirements.

Obiettivo

La famiglia Locanda è costituita di molti modelli differenti, ma tutti sono accomunati da una caratteristica che ne definisce la gamma: la forma, tubolare o circolare che sia, è di dimensioni sensibilmente ridotte. Questa peculiarità definisce la bellezza ed eleganza dell'effetto di luce risultante, assicurando un risultato perfetto nell'utilizzo della luminaria tanto come solista, quanto accompagnata da una qualunque altra luminaria a scopo prettamente architettuale o decorativo. Gli articoli di categoria montati a superficie o ad incasso, sono disponibili in svariati colori di rifinitura. A completare il pacchetto, la reperibilità degli apparecchi ad alta efficienza e basso consumo energetico anche con dettagli personalizzabili mirati a soddisfare qualunque esigenza del cliente.

Description

Housing - Made of die cast aluminum powder coated with choice of RAL color

Diffuser - PMMA optical lens specially for LED


LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm
9400307	7W	700lm	Ø60X35X202H
9400413	13W	Ø60X35X300H	



PHASE DIMMING	55°C	LED	ECO
-25°C	Glowing Wire Test - 850°		
IP 44	IK 06	UGR <19	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21	LM-80
PASEL ACCREDITATION	COB	CRI >90	
RoHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++	85~265V	50/60Hz	

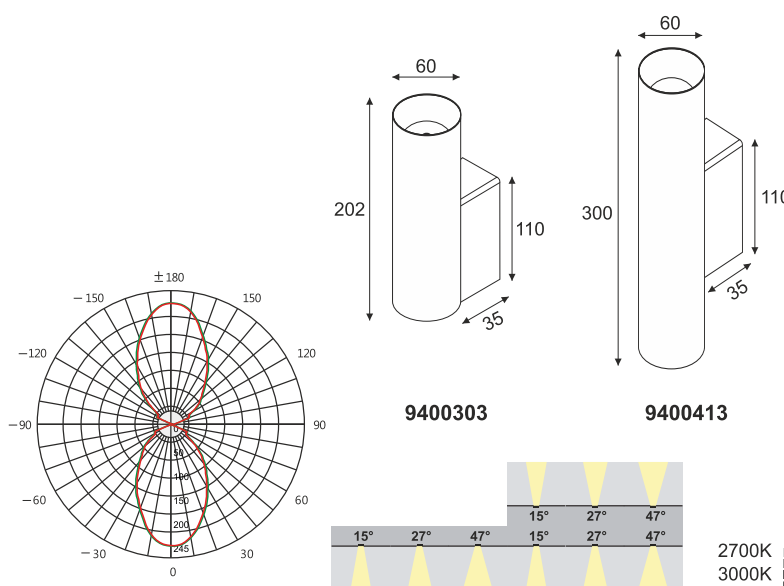

2700K
3000K
4000K
5000K



LED Drivers - PHILIPS GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.