

Objective

The LED source promise high performances while saving energy, in the respect of all the modern norms and the human health comfort and safety. The high quality of the raw materials guarantees the long working lifetime and the hard weather conditions resistance. A big family of floodlight available in many different designs and a really wide choice of wattage and details. The light is bright, uniform and intense but comfortable, with low glare ratings. Wide selection of optical beam for flexibility of application.

Obiettivo

La sorgente LED promette prestazioni elevate risparmiando energia, nel rispetto di tutte le norme moderne e del comfort e della sicurezza della salute umana. L'alta qualità delle materie prime garantisce la lunga durata di esercizio e la resistenza alle intemperie. Una grande famiglia di proiettori disponibili in molti design diversi e una vasta scelta di potenza e dettagli. La luce è brillante, uniforme e intensa ma confortevole, con bassi livelli di abbagliamento. Wide selection of optical beam for flexibility of application.

Description

Housing - Die cast aluminium with cover cowl shade with silicon rubber gasket powder coated with choice of RAL colors.

Diffuser - Tempered transparent glass with optical PMMA Polycarbonate lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


Standards - manufactured in accordance with tested as per PTPS IEC 62722.

Accessories - Tree belt, cowl, pole kit honeycomb.

CODE	WATTAGE	LUMEN	SIZE mm
2141503	3W	330lm	Ø85 X 95 X 148H
2141506	6W	660lm	Ø85 X 95 X 148H
2141510	10W	1100lm	Ø125 X 118 X 225H
2141520	20W	2200lm	Ø160 X 145 X 260H
2141530	30W	3300lm	Ø160 X 145 X 260H
2141560	60W	6600lm	Ø180 X 165 X 280 H
2141586	86W	9460lm	Ø180 X 165 X 280 H



LED	ENERGY STAR	ECO	IP66
PHASE DIMMING	DALI	1-10 DIMMING	IK 09
65°C	Glowing Wire	Test - 850°	UGR <21
-20°C	IP 66	IK 09	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE	LM-79 TM-21
PASEL ACCREDITATION	SMD	CRI >90	LM-80
ROHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++	85-265V	50/60Hz	

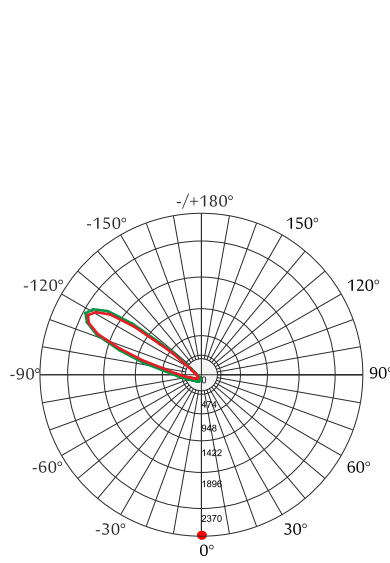

Tree Belt Cowl Pole Kit Honeycomb

5°	12°	20°	30°
45°	60°	15X30°	10X60°

2700K
3000K
4000K
5000K
6000K
6500K

LED Drivers - PHILIPS GHI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.