

**Objective**

Extra easy to install with C type connectors for all accessories and power supply as well make the full system easy to move and customize in full safety also for inexpert users. The profile is practically tool-less installation with application valid on both concrete and cement board ceiling and walls. This Elegant choice gives a modern architectural touch on any indoor environment, thanks to the profile's extra slim design. The fixtures are applied on the profile through strong magnet making the renovation or change of location easier than ever. A full choice range of compatible fixtures for o match different designs and different light effect and lighting function.

**Obiettivo**

L'installazione extra semplice possibile grazie alla connessione di tipo C che caratterizza tutti gli accessori e persino l'alimentatore led rende questo sistema facile da posizionare e personalizzare in totale sicurezza anche per gli utenti meno esperti. L'installazione è praticabile senza l'impiego di attrezzi speciali e può essere realizzata su soffitti e pareti sia in calcestruzzo che in cemento. Questa opzione elegante assicura un tocco architettonico moderno a qualunque ambiente grazie al design extra sottile del profilo. Le luminarie vengono installate sui profili tramite un potente magnete, cosicché la possibilità di un rinnovo od un cambio di posizionamento siano facilissimi e pertanto a portata di utente in qualunque momento. Un ventaglio di scelta per quanto riguarda le luminarie compatibili, tra le quali si annovera in ampia scelta di design, effetti di luce e funzionalità.

**Description**

**Housing** - Die cast aluminium with option of black & white finish.

**Diffuser** - Tempered clear glass or PMMA polycarbonate optical lens.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1

**Color** - Black, White, Silver & Gold



CODE	WATTAGE	LUMEN	SIZE mm
9110803	3W	366lm	Ø50 X 40H
9110806	6W	732lm	Ø60 X 47H
9110809	9W	1098lm	Ø85 X 60H



**Mounting Accessories**



tuya	Bluetooth	LED
PWM / 2.4Gwifi Controller	ECO	
55°C -25°C	Glowing Wire Test - 850°	
IP 40	Adjustable	UGR <19
		SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80
PASEL ACCREDITATION	COB	CRI >90
RoHS	SELV	F ENERGY STAR
CE	COMPLIANCE	U
<b>A++</b>	DC 48V	

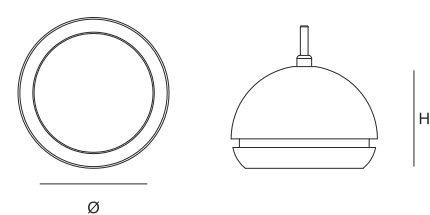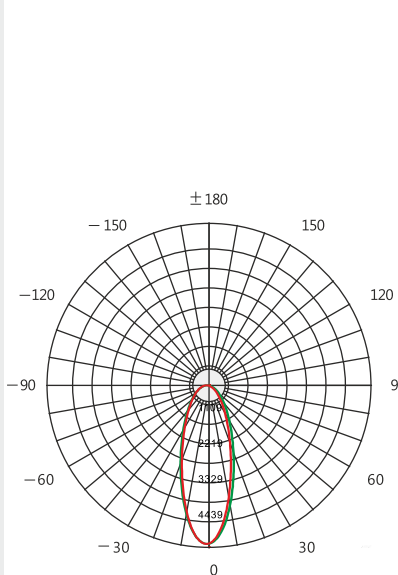

120°

2700K  
3000K  
3500K  
4000K  
5000K

LED Drivers - PHILIPS GTI MEAN WELL TDCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.