

**Objective**

Nowadays when we are going to choose a product we have to look as much as the economical issue as much as the human resources. That's why we have to think about energy savings as a priority. That's why we have to study how the light can affect the health and the work attitude of the employees, or the mood and the consecutive inclination to buy of a customer. Grand Cuore is the perfect balance between efficiency, performance and comfortable relaxing light effect results. The wide beam angle is provided thanks to the deep position of the light source.

**Obiettivo**

Oggi giorno quando stiamo per scegliere un prodotto dobbiamo guardare tanto al discorso economico quanto alle risorse umane. Ecco il perchè dobbiamo pensare al risparmio energetico come una priorità. Ecco perchè dobbiamo studiare come la luce può influenzare la salute e il responso lavorativo di un impiegato, oppure l'umore e la conseguente propensione all'acquisto di un cliente. Grand Cuore è il perfetto equilibrio tra efficienza, resa e un confortevole e rilassante effetto di luce. L'ampio angolo di luce è procurato grazie alla posizione incassata della sorgente.

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors













**Diffuser** - Opal polycarbonate diffuser.



**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm	
5095908	8W	880lm	Ø120 X 50H	Ø110
5095912	12W	1320lm	Ø120 X 50H	Ø110
5095918	18W	1980lm	Ø155 X 50H	Ø145
5095924	24W	2640lm	Ø175 X 50H	Ø165



		
<b>PHASE DIMMING</b>	<b>DALI</b>	<b>1-10 DIMMING</b>
	<b>Glowing Wire Test - 850°</b>	
<b>IP 54</b>		<b>UGR &lt;19</b>
	<b>EAC</b>	<b>SDCM 2.0/3.0</b>
<b>PASEL ACCREDITATION</b>	<b>SMD</b>	<b>COMPLIANCE LM-79 TM-21 (LF-80)</b>
	<b>CRI &gt;90</b>	
	<b>series wiring</b>	
		
<b>A++</b>	<b>85~265V 50/60Hz</b>	

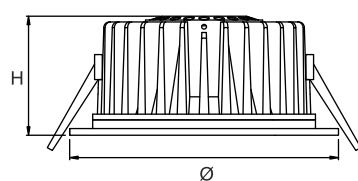

TRIO  
3000K  
4000K  
6000K



LED Drivers - PHILIPS    TRIDONIC | LED Chips - BRIDGELUX    PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.