

Objective

Bahelvan LED is the splendid and conclusive result of constant advancements made in its modern collection. Specially designed to be waterproof and dustproof. Perfectly arranged right down to the least detail, it sets new standards in the field of LED lighting technology, energy efficiency and design: it's fitted with highly efficiency LEDs which ensure excellent luminous flux performances while considerable saving energy. This light fitting gives modern architecture and an extraordinary sense of innovation and exclusivity.

Obiettivo

Bahelvan LED è lo splendido e conclusivo risultato dei continui progressi fatti nella sua moderna collezione. Appositamente progettato per essere impermeabile e antipolvere. Perfettamente sistemato nei minimi dettagli, stabilisce nuovi standard nel campo della tecnologia di illuminazione a LED, dell'efficienza energetica e del design: è dotato di LED ad alta efficienza che garantiscono eccellenti prestazioni di flusso luminoso con un notevole risparmio energetico. Questa lampada offre un'architettura moderna e uno straordinario senso di innovazione ed esclusività.



Description

- Housing** - Polycarbonate PMMA Opal cylindrical tube.
- Diffuser** - Mitsubishi PC Cylinder. diffuser specially for LED
- Mounting** - Suspension system with steel wires and height adjustable.
- LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.
- Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1
- Supplied with stainless steel clamp and mounting kit.
- Accessories** - Suspension kit.

CODE	WATTAGE	LUMEN	SIZE mm
1703120	20W	3200lm	600 / 1200 X 124 X 67 H
1703130	30W	4800lm	600 / 1200 X 124 X 67 H
1703140	40W	6400lm	1200 X 124 X 67 H
1703150	50W	8000lm	1200 X 124 X 67 H
1703160	60W	9600lm	1200 x 124 X 67 H



LED	ENERGY STAR	ECO	DIFFERENT LENGTH
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C			
IP 67	IK 09	UGR <19	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	SMD	CRI >90	
ROHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++		85~265V 50/60Hz	

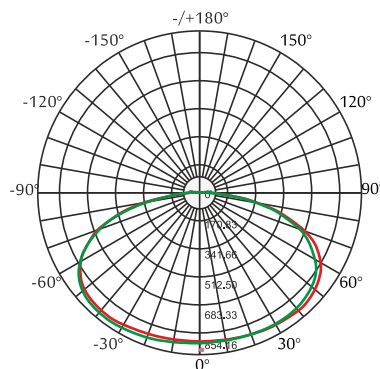

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTI | LED Chips - BRIDGELUX SHARP SAMSUNG PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.