

Objective

This range is suitable for every wall. The high quality of the raw materials ensures high resistance to dust, extraneous corps in general, humidity and water. The LED system is highly efficient to provide excellent luminous flux results in low consumption. The item presents also features as easy installation and low maintenance requirements. It can fit for pathway wall, parking wall, ramp and many low height mounting applications.

Obiettivo

Questa gamma è adatta a ogni parete. L'alta qualità delle materie prime garantisce un'elevata resistenza a polvere, corpi estranei in genere, umidità e acqua. Il sistema LED è altamente efficiente per fornire un flusso luminoso eccellente con bassi consumi. L'articolo presenta anche caratteristiche quali facilità di installazione e scarsa necessità manutenzione. Può adattarsi a pareti di passaggio, pareti di parcheggio, rampe e molte aree a bassa applicazioni di montaggio.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Tempered clear glass diffuser.



Reflector - White laminated aluminum reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


Standards - manufactured in accordance with tested as per PTPS IEC 62722

Accessories - Supply with PVC box for recessed wall mounting.

| CODE | WATTAGE | LUMEN | SIZE mm | |
|---------|---------|--------|----------------|----------------|
| 1512506 | 6W | 630lm | 310 X 86 X 65H | 310 X 90 X 65H |
| 1512510 | 10W | 1050lm | 310 X 86 X 65H | 310 X 90 X 65H |
| 1512514 | 14W | 1470lm | 310 X 86 X 65H | 310 X 90 X 65H |

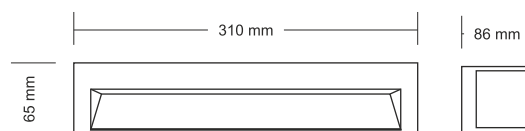

| | | | | | | | | | |
|---------------------|--|------------|--|--------------|--|--------------|--|------------|--|
| PHASE DIMMING | | DALI | | 1-10 DIMMING | | LED | | | |
| IP 65 | | IK 08 | | UGR <19 | | SDCM 2.0/3.0 | | COMPLIANCE | |
| PASEL ACCREDITATION | | SMD | | CRI >90 | | LM-79 TM-21 | | LM-80 | |
| ROHS | | SELV | | F | | | | U | |
| CE | | COMPLIANCE | | 220~240V | | 50/60Hz | | A++ | |



- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.