

**Objective**

All the Bonnie family wears the signature of quality and beauty of a regnant in the spotlights world. Available in a choice of options in a matter of design and power, plus the chance to more than easily replace the LED source with another one, same or different it will be. This item is pure functionality and adaptable to every requirement. The high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item, which makes technicians and artists in love with it.

**Obiettivo**

Tutta la famiglia Bonnie porta la firma della qualità ed eleganza di un regnante nel mondo dei faretti da incasso. Disponibile in una scelta di opzioni per quanto concerne il design e la potenza, più l'opportunità di sostituire più che facilmente la sorgente LED con un'altra, sia essa uguale o differente. Questo articolo è pura funzionalità ed adattabile per ogni esigenza. La sorgente LED ad alta efficienza assicura eccellenti performance e bassi consumi. Risparmio energetico ed economico sono niente più che un piccolo vantaggio se comparati al design di questo prodotto, che si fa amare sia dai tecnici che dagli artisti.

**Description**

**Housing** - Die cast aluminum powder coated with choice of RAL colors

**Diffuser** - PMMA optical function high definition lens.

**Reflector** - Anti glare lower ring reflector.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

**Color** - White, Bronze, Black

CODE	WATTAGE	LUMEN	SIZE mm	
6086607	7W	840lm	85 X 85 X 90 H	75 X 75mm
6086615	15W	1800lm	85 X 85 X 90 H	75 X 75mm



PHASE DIMMING		DALI		1-10 DIMMING		LED	
55°C		-25°C		Glowing Wire Test - 850°		IP 44	
IP 44		ECO		UGR <19		SDCM 2.0/3.0	
CIDET		EAC		COMPLIANCE LM-79 TM-21		LMF-80	
PASEL ACCREDITATION		COB		CRI >90		series wiring	
ROHS		SELV		F		series wiring	
CE		COMPLIANCE		U		A++	
85~265V		50/60Hz					

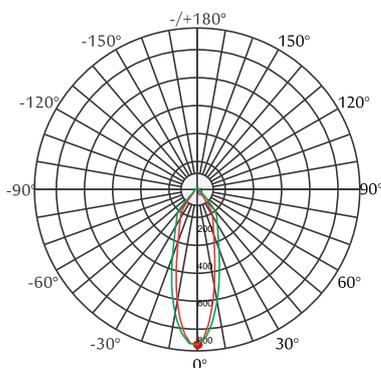

15°	26°	38°	
2700K			
3000K			
4000K			
5000K			
6000K			

LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.