

Objective

Recessed movable track light was born as a projector, but can be surface mounted or even recessed in the ceiling. The purpose is to provide a projector with all its peculiarities even where the architectural characteristics don't permit that. The LED advanced system and the extremely high quality of its performance makes the luminaire purely efficient and very helpful in energy saving. The character of the design, determined and professional, is highlighted from the pure die-cast aluminium of the housing. The applications are bar, restaurants, museum, art galleries. This option is a pull-out spotlight for indoor applications.

Obiettivo

Binario mobile ad incasso luce è nata come proiettore, ma può essere montata in superficie oppure incassata nel soffitto. Lo scopo è di procurare un proiettore con tutte le sue peculiarità anche dove le caratteristiche architettonici non lo consentono. Il sistema LED avanzato è l'estrema qualità delle sue prestazioni rende la luminaria puramente efficiente e di valido aiuto nel risparmio energetico. Il carattere del design, determinato e professionale, è evidenziato dal puro alluminio pressofuso del corpo. Gli impieghi sono bar, ristoranti, musei, gallerie d'arte. Questa versione è un proiettore da incasso a scomparsa.

Description

Housing - Die cast aluminium with solvent free PVC coated with choice of RAL colors

Diffuser - Tempered clear glass.

Reflector - Pure anodized aluminum reflector.




LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm	Ø
5095120	20W	2280lm	Ø100 X 190 H	Ø90
5095125	25W	2850lm	Ø100 X 190 H	Ø90
5095130	30W	3420lm	Ø100 X 190 H	Ø90



LED	ENERGY STAR	ECO
PHASE DIMMING	DALI	1-10 DIMMING
55°C	Glowing Wire Test - 850°	
-25°C		
IP 44	Adjustable	UGR <19
		SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE
		LM-79 TM-21
PASEL ACCREDITATION	COB	CRI >90
		series wiring
ROHS	SELV	F
CE	COMPLIANCE	U
A++	85-265V	50/60Hz

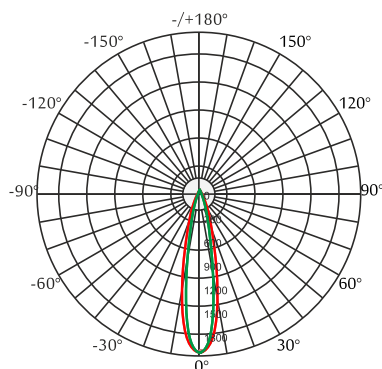

2700K
3000K
4000K
5000K
6000K
6500K



LED Drivers - PHILIPS GTI | MWM | GTCI TRIDONIC | LED Chips - BRIDGELUX | CREE | SHARP | SAMSUNG | PHILIPS | CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.