

Objective

Classic shape and minimal design are enclosing here a high efficiency and high powerful LED system, which is basic to ensure as the high efficiency of the device in lumen output as the energy savings and the payback timing. The item comes equipped with reflector and clear protection glass or with Opal polycarbonate diffuser. Suitable for many and different applications.

Obiettivo

Classica forma e design minimalista racchiudono qui un sistema LED altamente efficace ed altamente potente, che è fondamentale per assicurare tanto l'alta efficienza del dispositivo per quanto concerne la resa in lumen quanto il risparmio energetico e i tempi di "ripago". L'articolo si presenta equipaggiato di riflettore e vetro trasparente di protezione oppure con il diffusore opaco in policarbonato. È adatto per vari e differenti impieghi.


Description

Housing - Die cast aluminium powder coated with choice of RAL colors









Diffuser - Polycarbonate PMMA opal diffuser.



LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722


CODE	WATTAGE	LUMEN	SIZE [D x H]	
5093310	10W	1200lm	Ø100 X 45 H	Ø90
5093316	16W	1920lm	Ø140 X 62 H	Ø120
5093322	22W	2640lm	Ø190 X 82 H	Ø175



		
PHASE DIMMING	DALI	1-10 DIMMING
	Glowing Wire Test - 850°	
IP 54		SDCM 2.0/3.0
	EAC	COMPLIANCE LM-78 TM-21 LM-80
PASEL ACCREDITATION	SMD	CRI >90
	SELV	series wiring
CE		U
A++	85-265V 50/60Hz	

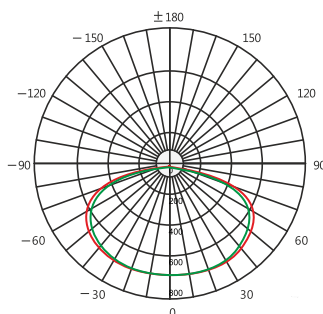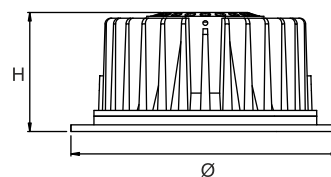

2700K
3000K
4000K
5000K
6000K
6500K




LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS  CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.

Fixing fit color is optional :orange/green/blue




Rotatable fixing clip is adaptable to 1-45mm ceiling

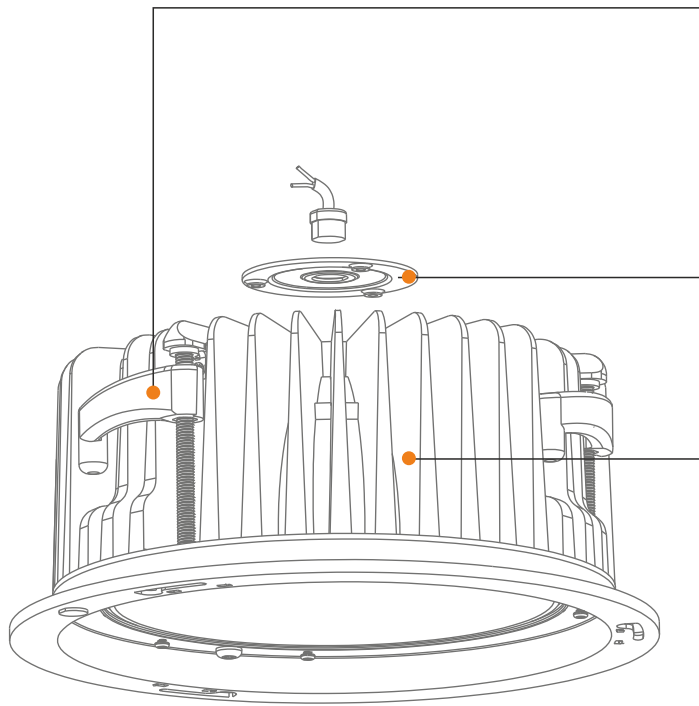


Strain relief system guarantees cable safety

Original design downlight housing
Excellent thermal performance



LED module: up to 6,000 Lm/50W


- CREE: high power LED;
- SAMSUNG: mid-power SMD LED;
- CITIZEN: COB LED



High diffused reflector



High transmitting diffuser

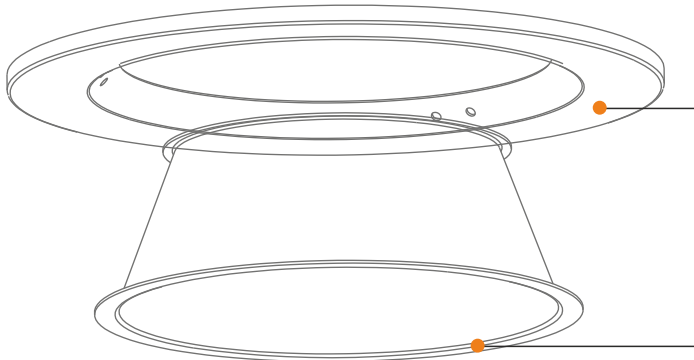

Interchangeable mounted ring twisted&lock

Dark light reflector

