

Objective

With minimal size and pure functionality, our item Torchic is equipped with a miniature high efficiency LED source, which is providing high lumen output while saving energy and consequently saving consumption and money. So here we provide an item characterized by perfect balance between size and luminous flux, an item which combines extremely precise accent light features with high performances. It can be used anywhere.

Obiettivo

Con minima taglia e funzionalità, il nostro articolo Torchic è dotato di una minuscola sorgente LED ad alta efficienza, che procura un elevato livello di lumen in uscita risparmiando allo stesso tempo energia, e quindi denaro. Quindi qui provvediamo a creare un prodotto caratterizzato dal perfetto equilibrio tra taglia e flusso luminoso, un prodotto che combina le peculiarità di una luce d'accento estremamente precisa con alte prestazioni. Può essere usato ovunque.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Prismatic diffuser lens.

Reflector - Pure anodized aluminum reflector.




LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

CODE	WATTAGE	LUMEN	SIZE mm		
6071701	1W	120lm	Ø40 X 30 H	Ø25	
6071703	3W	360lm	Ø40 X 30 H	Ø25	



PHASE DIMMING	DALI	1-10 DIMMING
55°C	Glowing Wire Test - 850°	
-25°C	IP 65	ECO
	EAC	COMPLIANCE
PASEL ACCREDITATION	COB	CRI >90
	SELV	series wiring
CE		
A++	85~265V 50/60Hz	

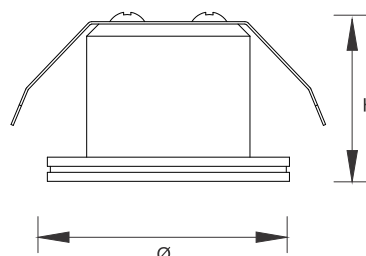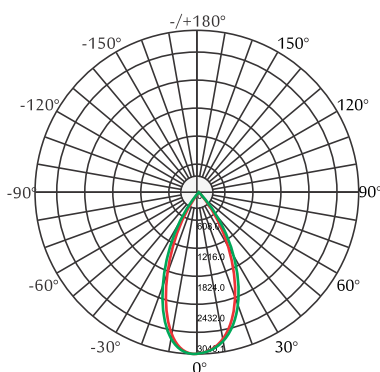

2700K
3000K
4000K
5000K
6000K
6500K



LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.