

Objective

The item has the classic design of a bollard or pole light, available with little differences in the top shape to satisfy the details lovers. The light source is an LED high efficiency system, which ensures high performances while saving energy. All the items have features like easy installation, very low maintenance needs and full safety for electrical systems and people.

Obiettivo

L'articolo ha il design classico di un paletto luminoso, disponibile con piccole differenze nella forma superiore per soddisfare gli amanti dei dettagli. La sorgente luminosa è un sistema LED ad alta efficienza, che garantisce elevate prestazioni risparmiando energia. Tutti gli articoli hanno caratteristiche come facilità di installazione, esigenze di manutenzione molto basse e piena sicurezza per gli impianti elettrici e le persone.

Description

Housing - Made of dia cast aluminum powder coated with choice of RAL colors.

Diffuser - Vandal resistant, U2 self existing polycarbonate,

UV stablized with prismatic pattern diffuser specially for LED

Reflector - Anodized aluminum reflector.



LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

CODE	WATTAGE	LUMEN	SIZE mm
1340906	6W	630lm	132 X 700H



LED		ENERGY STAR	
65°C	Glowing Wire Test - 850°		
-20°C	IP 54	IK 07	UGR <22
	SDCM 2.0/3.0	COMPLIANCE	
		LM-79	TM-21
		LM-80	
PASEL ACCREDITATION	SMD	CRI >90	
SELV	ROHS	ECO	
CE	COMPLIANCE	U	
A++		220~265V 50/60Hz	

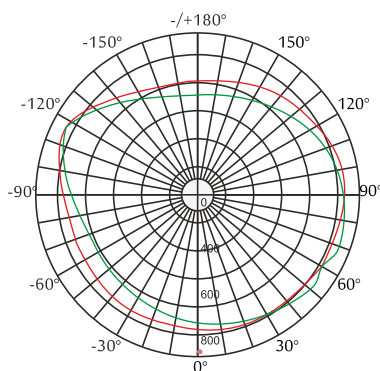

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.