

Objective

Especially created with COB high power LED chip to provide high brightness. The Heat sink of pure Die-cast aluminium is though specially to provide in this item the strong and the resistance needed to distinguish its value in the market. This item is pure efficiency, while giving extreme attention to the consumptions costs and the energy savings

Obiettivo

Specialmente creato con il LED COB ad alto potenziale per procurare alti livelli di luminosità. Il dissipatore di puro alluminio pressofuso è pensato per dare al prodotto il tocco di forza e resistenza che ne distingue il valore sul mercato. Questo articolo è pura efficienza, prestando estrema attenzione ai costi di consumo ed al risparmio energetico.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Tempered clear or frosted glass

Reflector - Anodized aluminum reflector.



LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE [D x H]	
5091736	36W	4320lm	Ø205 X 85 H	Ø175
5091745	45W	5400lm	Ø205 X 85 H	Ø175



PHASE DIMMING	DALI	1-10 DIMMING
55°C	Glowing Wire Test - 850°	
-25°C		
IP 54	UGR <19	SDCM 2.0/3.0
	COMPLIANCE LM-79 TM-21 (lm-80)	
PASEL ACCREDITATION	COB	CRI >90
	SELV	series wiring
CE		
	85-265V 50/60Hz	

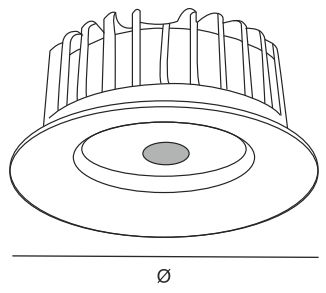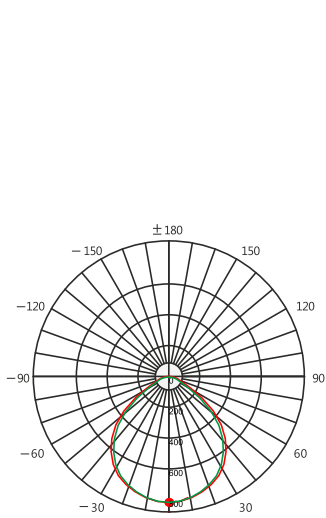

	2700K	
	3000K	
	4000K	
	5000K	
	6000K	
	6500K	

LED Drivers - PHILIPS TRIDONIC | LED Chips - BRIDGELUX PHILIPS

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.