

**Objective**

The all-in one Solar Street light with high efficiency LED system and a matched Samsung battery size to guarantee three days of autonomy. The Leopardi is perfectly suited for areas where no power is currently available or difficult to provide. This item is dark sky compliant, so there are no wastes of light. Product has the function of auto-dimming to save the power and battery serving hours supplied with the lithium battery from Samsung with five years life guaranty in advantage this light equipped with Philips led SMD has high lumen from 140-160 lumen per watt

**Obiettivo**

Il lampione solare all-in-one con sistema LED ad alta efficienza e una batteria Samsung abbinata per garantire tre giorni di autonomia. Leopardi è perfettamente adatto per aree in cui attualmente non è disponibile energia o è difficile fornire. Questo oggetto è conforme al cielo scuro, quindi non ci sono sprechi di luce. Il prodotto ha la funzione di auto-oscuramento per risparmiare energia e ore di servizio lithimo batteria fornite con la batteria al litio di Samsung con anni di garanzia garantiti a vita in vantaggio questa luce dotata di SMD led Philips ha un alto lumen da 140-160 lumen per watt

**Description**

**Housing** -Made of dia cast aluminum equipped with lithium battery, housing powder coated with choice of RAL color.

**Diffuser** - Optical glass lens with function of beam control

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1

**Accessories** - Motion sensor and dimming controller upon request.



CODE	WATTAGE	LUMEN	SIZE mm
13367030	30W	4200lm	900 X 430 X 120 H
13367040	40W	5600lm	1050 X 430 X 120 H
13367050	50W	7000lm	1050 X 430 X 120 H
13367060	60W	8400lm	1050 X 430 X 120 H
13367070	70W	9800lm	1050 X 430 X 120 H
13367080	80W	11200lm	1050 X 430 X 120 H
13367090	90W	12600lm	1050 X 430 X 120 H
13367100	100W	14000lm	1050 X 430 X 120 H

LED	ENERGY STAR	ECO
PHASE DIMMING	DALI	1-10 DIMMING
65°C	Glowing Wire	-20°C
IP 67	IK 08	UGR <22
CIDET	EAC	SDCM 2.0/3.0
PASEL ACCREDITATION	SMD	CRI >90
RoHS	SELV	series wiring
CE	COMPLIANCE	U
A++	DC 12V	DC 24V

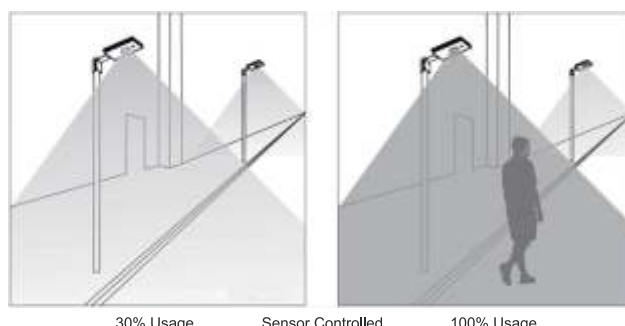

30% Usage      Sensor Controlled      100% Usage

When nobody around the light, it works at 30% power automatically. When people pass by, the motion sensor detects it and the light will be at 100% power.

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.

### All-in-One Solar Street Light

IP67, CE and RoHS Compliant



Modular LED Philips LED Chip


Constructed of high strength aluminum and stainless steel for outstanding corrosion resistance




Lithium Ion Battery Enclosure is waterproof and corrosion resistant




Solar Panel Slope Angle is adjustable from 10 to 20 degrees.

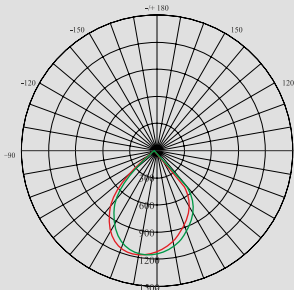

60°

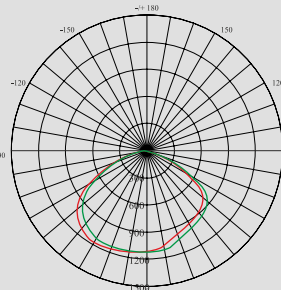

90°

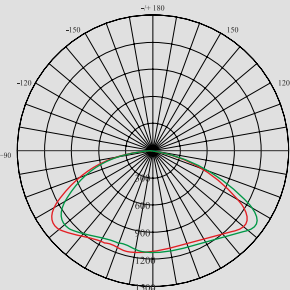

120°

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.