

Objective

Featuring sleek design technology, I-PRISM panel light offers the ideal combination of stylish design and optimum performance for both task and general lighting. Micro prismatic glare reduction opal made of PMMA controlling the low rate of UGR (Unified Glare Rating). Ensures the optimum light distribution and full glare control in compliance with the latest office-lighting.

Obiettivo

Dotato di una tecnologia di design elegante, il pannello luminoso I-PRISM offre la combinazione ideale di design elegante e prestazioni ottimali sia per l'illuminazione generale che per quella da lavoro. Opale antiabbagliamento microprismatico realizzato in PMMA per il controllo del basso tasso di UGR (Unified Glare Rating). Assicura la distribuzione ottimale della luce e il pieno controllo dell'abbagliamento in conformità con le più recenti luci per uffici.

Description

Housing - Extruded Aluminum frame powder coated with different RAL color option.

Diffuser - Micro prismatic glare reduction opal made of PMMA controlling low rate of UGR (Unified Glare Rating)

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722



Mounting Methods - Dampa aluminum ceiling, lay in, suspended, recessed clips.

Accessories - Pushing Frame for aluminum grid ceiling, suspension kit, clips.

CODE	WATTAGE	LUMEN	SIZE mm
9534136	36W	4320lm	595 X 595 X 49H
9534148	48W	5760lm	595 X 595 X 49H
9534036	36W	4320lm	1195 X 295 X 49H
9534240	40W	4800lm	620 X 620 X 49H
9534360	60W	7200lm	1195 X 595 X 49H



LED	EMERSON	ECO	
PHASE DIMMING	DALI	1-10 DIMMING	
55°C	Glowing Wire Test - 850°		
-25°C			
IP 44	IK 06	UGR <19	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21	LM-80
PASEL ACCREDITATION	SMD	CRI >90	
SELV	F	series wiring	
CE	COMPLIANCE	U	
A++	85-265V	50/60Hz	

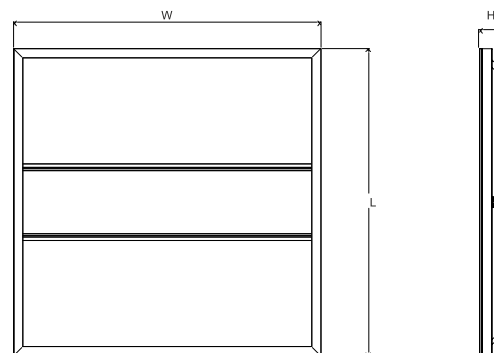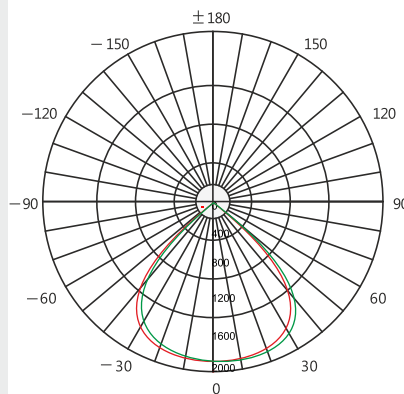

TRIO
3000K
4000K
6000K



LED Drivers - PHILIPS GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.