



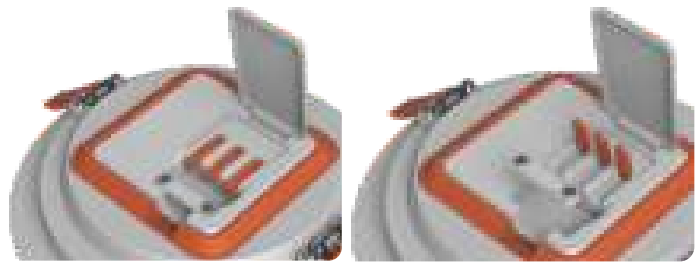

## \*\*\*INSTALLATION MANUAL\*\*\*


### Safety tips before starting

- \*Let always an expert/authorized technician make the installation.
- \*Before you start please shut off the power to prevent electric shock.
- \*The products with energetic class II do not require the Earth / Ground connection so please do not connect the neutral if is not required. Instead, if the item is class energetic I, please do connect the neutral to Earth.
- \*Consider always to leave some space for the heat sink of the led device, it need it to cool down after use
- \*Do not connect any Led device without its recommended driver
- \*Your individual product may vary from the design shown in the pictures
- \*Do not disassemble your product
- \*If any modification is made in the item or any wrong installation cause any damage to it, the warranty will be invalidated.




1. Make the cut the ceiling as per correct item size.  
Please note the item cutout diameter is mentioned in the box.

2. open the flap for wiring and lift the 3 orange connector-flaps along with the wire gripper

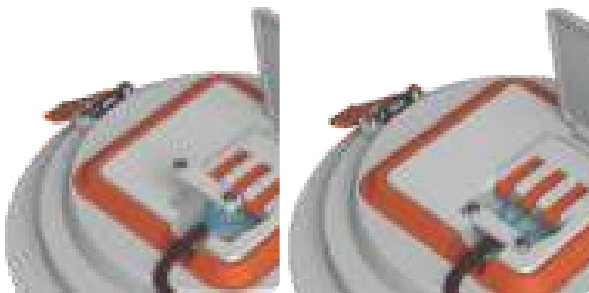

3. Insert the wires following the indications (L, N, PE) and lock the connector-flap.  
When connection are secured, screw in the wire gripper to secure the wires.



4. Close the flap and pull back the 2 spring buckles to insert/position into the ceiling cut hole.

#### PLEASE NOTE:

Items with 1-10V or DALI dimmable features have REMOTE LED DRIVER PROVISION ONLY.

In this case the back driver box will be empty requiring to connect 2 wires (L and N) from the connection flap spot to the designated led driver itself. If you require installation support please refer to your supplier for support.

**Thanks for your purchase !**