

**Objective**

Classic design with a touch of grit coming in cylindrical or parallelepiped shape, this luminaire has a tested IP 44, to be elegant and stylish solution in covered area. The die-cast aluminium body and the tempered glass diffuser guarantee a solid and long lasting product, which is equipped with high efficiency lumen LED system to provide excellent lighting performance. Waste of energy and money are no longer an issue with low consumption energy savings and short payback provided from Sybil. The low glare effect ensures a comfortable light effect for the human eye

**Obiettivo**

Design classico con un tocco di grinta nella forma cilindrica o parallelepipeda, questa luminaria possiede un testato IP 44, per essere elegante e di stile ovunque. L'armatura di alluminio pressofuso ed il diffusore di vetro temperato garantiscono un articolo solido e durevole, che è equipaggiato di un sistema LED ad alta efficienza per garantire eccellenti prestazioni illuminotecniche. Spreco di energia e denaro non sono più un problema con i bassi consumi ed il risparmio energetico assicurati da Sybil. Il basso effetto abbagliamento assicura un effetto di luce confortevole per l'occhio umano.

**Description**

**Housing** - Die cast aluminium supplied with mounting kit.

**Diffuser** - Clear tempered glass.

**Reflector** - Polished aluminum black anodized reflector.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.





**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

**Colors** - White, Black, Gold, Silver

CODE	WATTAGE	LUMEN	SIZE mm
5593810	10W	1150lm	90 X 90 X 100H
5593815	15W	1725lm	90 X 90 X 100H
5593820	2X10W	2300lm	175 X 90 X 100H
5593830	2X15W	3450lm	175 X 90 X 100H



LED	EMERSON	ECO	
PHASE DIMMING	REMOTE DIMMING		
65°C	Glowing Wire Test - 850°		
-20°C			
IP 44	IK 06	UGR <19	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21	LM-80
PASEL ACCREDITATION	COB	CRI >90	
SELV	series wiring		
ROHS			
CE	COMPLIANCE		
A++	85-265V 50/60Hz		

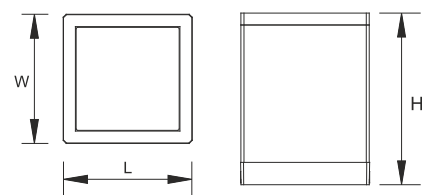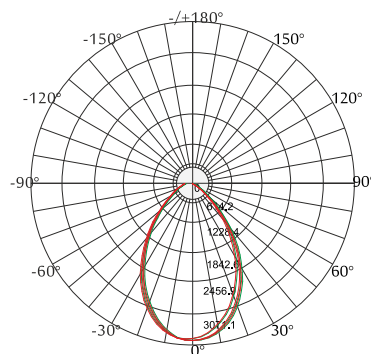

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.