Objective

Tempered glass diffuser and hard die cast aluminium heat sink, to guarantee the durability of the product, its excellent finish, high efficient heat diffusion. Multi-use down light applicable everywhere. Thanks to its tested IP 54, the item does not fear the high humidity levels. Studied to provide the best results in the smallest consumptions.

Obiettivo

Diffusore in vetro temperato e robusto dissipatore in alluminio pressofuso, per garantire la durabiità del prodotto, la sua eccellente finitura, alta efficienza di diffusione del calore. Luminaria da soffitto multiuso, applicabile ovunque. Grazie al suo testato IP 54, l'articolo non teme alti livelli di umidità. Studiato per procurare i migliori risultati nei minori consumi.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors

Diffuser - Tempered frosted or clear glass diffuser.

Reflector - Anodized aluminium.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE [D x H]	
5092416	16W	1920lm	130X130X70H	110X110
5092421	21W	2520lm	130X130X70H	110X110
5092426	26W	3120lm	165X165X70H	145X145
5092431	31W	3720lm	165X165X70H	145X145
5092436	36W	4320lm	210X210X70H	190X190
5092441	41W	4920lm	210X210X70H	190X190

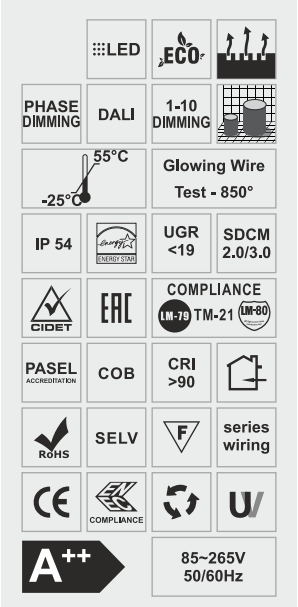



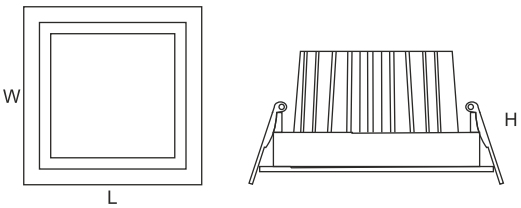



TRIO
2700K
3000K
4000K
5000K
6000K
6500K

LED Drivers - PHILIPS GTI MEAN WELL TCI TRIDONIC | LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.