

Objective

Spotlight with driver and LED chip are separated, which prolongs the working life span of the luminaire. The energy saving is up to 95%. The deep-positioned light source helps to keep the glare effect in very low levels. The colour rendering index is high, and the quality of the light is kept constant for long time with very low luminance decrease. Easy to install with the chance to change the colour of the inner reflector. Mainly employed in offices, shops, restaurants, kitchens, living rooms, bedrooms.

Obiettivo

Riflettore diver e chip LED sono separati, così da prolungare la vita di funzionamento della luminaria. Risparmio energetico fino al 95%. La sorgente di luce posizionata in fondo aiuta a mantenere l'effetto abbagliamento al minimo. L'indice di resa cromatica è alto e la qualità della luce è mantenuta costante per lungo tempo con una decrescita bassissima. Facile da installare con la possibilità di cambiare il colore del riflettore interno. Principalmente impiegata in uffici, negozi, ristoranti, cucine, salotti e camere da letto.

Description

Housing - Die cast aluminium with PVC coated with choice of RAL colors


Diffuser - Clear tempered glass lamp diffuser.

Reflector - Aluminium reflector with multi anodized colors.









LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.




Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

Color - White, Satin, Silver, Gold, Black

CODE	WATTAGE	LUMEN	SIZE mm	
6094609	09W	1080lm	Ø90 X 120H	Ø120
6094612	12W	1440lm	Ø90 X 120H	Ø120
6094616	16W	1920lm	Ø90 X 120H	Ø120
6094625	25W	3000lm	Ø135 X 147H	Ø165



FRAMELESS	ECO	
PHASE DIMMING	DALI	1-10 DIMMING
55°C	Glowing Wire Test - 850°	
-25°C	IP 44	Adjusting
UGR <19	SDCM 2.0/3.0	COMPLIANCE
		
PASEL ACCREDITATION	COB	CRI >90
	SELV	series wiring
		
A++	85-265V 50/60Hz	

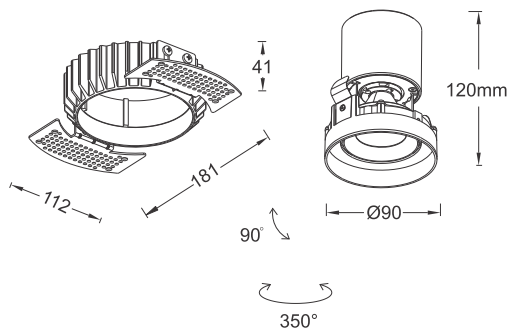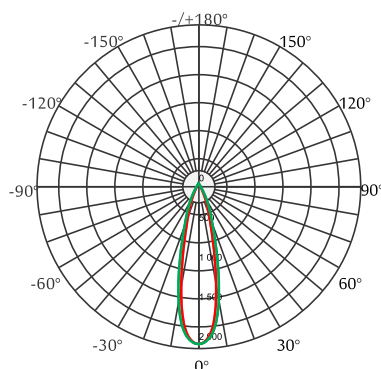

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS    TRIDONIC  CREE  SAMSUNG  CITIZEN 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.