

Objective

Nowadays when we are going to choose a product we have to look as much as the economical issue as much as the human resources. That's why we have to think about energy savings as a priority. That's why we have to study how the light can affect the health and the work attitude of the employees, or the mood and the consecutive inclination to buy of a customer. Imola is the perfect balance between efficiency, performance and comfortable relaxing light effect results. Wide beam angle and no glare effect, thanks to the deep position of the light source.

Obiettivo

Oggi giorno quando stiamo per scegliere un prodotto dobbiamo guardare tanto al discorso economico quanto alle risorse umane. Ecco il perchè dobbiamo pensare al risparmio energetico come una priorità. Ecco perchè dobbiamo studiare come la luce può influenzare la salute e il responso lavorativo di un impiegato, oppure l'umore e la conseguente propensione all'acquisto di un cliente. Imola è il perfetto equilibrio tra efficienza, resa e un confortevole e rilassante effetto di luce. Ampio fascio di luce e nessun effetto abbagliamento, grazie alla posizione incassata della sorgente di luce.

Description

Housing - Die cast aluminium with PVC coated with choice of RAL colors

Diffuser - Clear tempered glass lamp or optical lens diffuser.

Reflector - Pure anodized aluminum reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



Standards - manufactured in accordance with tested as per PTPS IEC 62722, EN 60598-1

Color - White, Black, Silver

CODE	WATTAGE	LUMEN	SIZE mm	Ø
6095407	7W	840lm	Ø94 X 64 H	Ø85
6095409	9W	1080lm	Ø94 X 64 H	Ø85
6095412	12W	1440lm	Ø94 X 64 H	Ø85
6095415	15W	1800lm	Ø94 X 64 H	Ø85



PHASE DIMMING		DALI		1-10 DIMMING		ECO	
55°C		-25°C		Glowing Wire Test - 850°			
IP 65		UGR <19		SDCM 2.0/3.0			
EAC		COMPLIANCE LM-79 TM-21 (lm-80)					
PASEL ACCREDITATION		COB		CRI >90		series wiring	
ROHS		SELV		series wiring			
CE		COMPLIANCE		U			
A++		85-265V 50/60Hz					

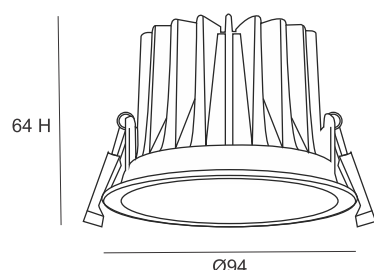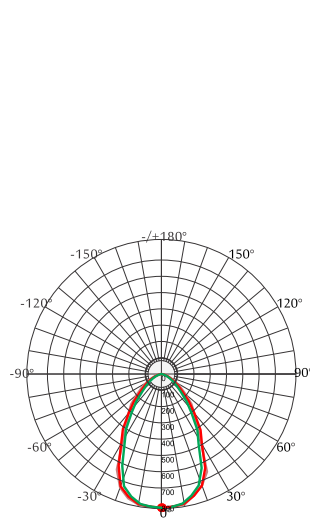

24°	36°	60°
2700K	3000K	4000K
5000K	6000K	6500K

LED Drivers - PHILIPS **GTI** **MEAN WELL** **GTCI TRIDONIC** LED Chips - BRIDGELUX **CREE** **SHARP** **SAMSUNG** **PHILIPS** **CITIZEN**

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that has recent technology will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.