

Objective

Trimless Siciliana aggressive inground fixture ideal application for Floor ceiling recessed luminaire intended for use with monochromatic and LED and RGBW light sources, 24v version or 220-240v (50-60 Hz) comparability with DMX512, DALI, Comprising body, Die Cast aluminium body and flush end caps in die-cast zamak complete with silicone gaskets. Liquid acrylic paint ensuring high resistance to atmospheric agents and UV rays. Optical compartment closed at the top by a 8mm thick transparent glass screen product can be with glare filter honey comb. Wall-grazing Spot light distribution optics Wall grazing As spot, medium, flood.

Obiettivo

Siciliana Apparecchio da incasso con cornice a filo aggressivo ideale per apparecchi da incasso a soffitto Floor destinati all'uso con sorgenti luminose monocromatiche e LED e RGBW, versione 24v o 220-240v (50-60 Hz) comparabili con DMX512, DALI, corpo comprendente, corpo in alluminio pressofuso e filo testate di chiusura in zama pressofusa complete di guarnizioni in silicone Vernice acrilica liquida che garantisce un'elevata resistenza agli agenti atmosferici e ai raggi UV. Vano ottico chiuso nella parte superiore da uno schermo in vetro trasparente di spessore 8mm può essere con filtro antiabbagliante a nido d'ape. Ottica di distribuzione della luce spot Pascolo a parete Come spot, medium, flood.

Description

Housing - Made of high corrosion extruded aluminum, sealed with silicon gasket rubber.



Diffuser - Clear or frosted tempered Glass diffuser specially for LED with PMMA optical lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

Accessories - Recessed aluminium box, 1m wire length, honeycomb.

CODE	WATTAGE	LUMEN	SIZE mm	Ø
1114003	3W	345lm	200 X 50 X 75H	200 X 50 X 88
1114006	6W	690lm	300 X 50 X 75H	300 X 50 X 88
1114012	12W	1380lm	500 X 50 X 75H	500 X 50 X 88
1114024	24W	2760lm	1000 X 50 X 75H	1000 X 50 X 88
1114036	36W	4140lm	1000 X 50 X 75H	1000 X 50 X 88

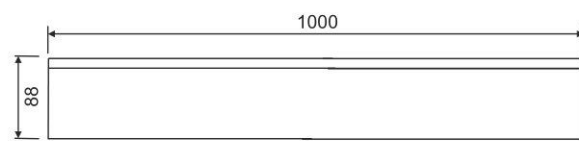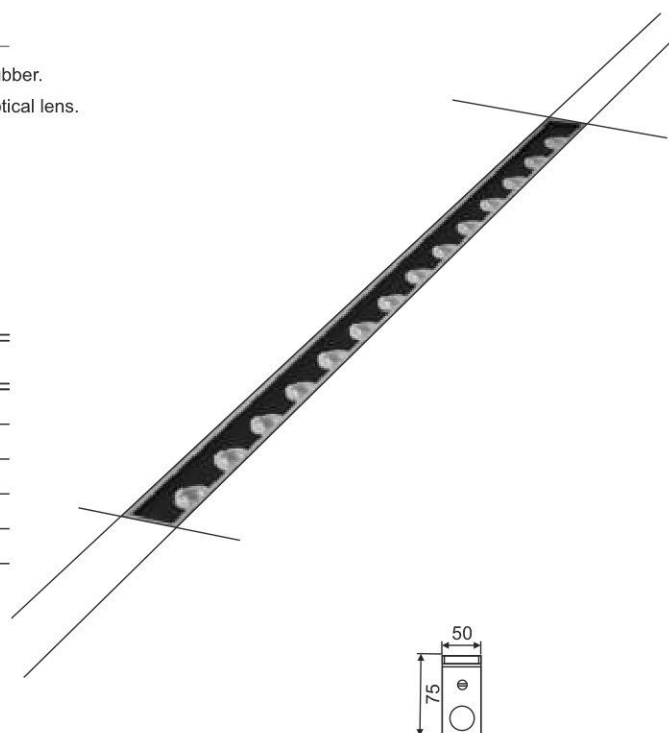

LED
FRAMELESS ECO
PHASE DIMMING DALI 1-10 DIMMING
65°C Glowing Wire Test - 850°
-20°C
IP 67 IK 10 UGR <21 SDCM 2.0/3.0
CIDET EAC COMPLIANCE LM-79 TM-21 LM-80
PASEL ACCREDITATION SMD CRI >90
RoHS SELV F series wiring
CE COMPLIANCE U
A++ DC 24V 220-240V 50/60Hz

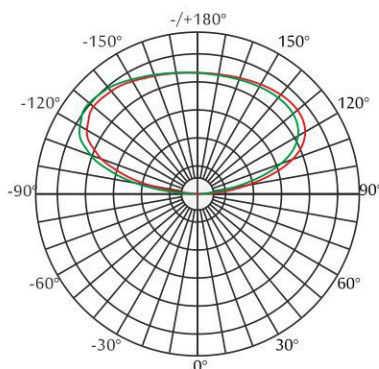

2500 KG LOAD
Honeycomb Outer Box with wire provision
15° 24° 36° 10X45° 110°
RGB RGBW 2700K 3000K 4000K 6000K



LED Drivers - PHILIPS GTI AUV TCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.