

Objective

The linear light ideal to make all your facades very fashion and bright. The LED source, warranting high performances in lumen rates and light quality, saves considerable energy, so the item has "green" features. As light quality we mean uniform, bright and warm light, which has to be also comfortable and pleasant, respecting the human eye needs: all this is possible thanks to the low glare rating provided in this item. The long working lifespan is guaranteed from the quality of LED and the raw materials.

Obiettivo

L'apparecchio di illuminazione lineare ideale per rendere tutte le tue facciate molto fashion e luminose. La sorgente LED, che garantisce elevate prestazioni in termini di luminosità e qualità della luce, consente di risparmiare energia considerevole, pertanto l'articolo ha caratteristiche "verdi". Come luce, intendiamo luce uniforme, luminosa e calda, che deve essere anche confortevole e piacevole, nel rispetto delle esigenze dell'occhio umano: tutto ciò è possibile grazie al basso livello di abbagliamento fornito in questo articolo. La durata della vita lavorativa è garantita dalla qualità dei LED e delle materie prime.

Description

Housing - Extruded aluminium profile powder coated with choice of RAL colors.

Diffuser - Tempered transparent glass with optical glass lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.





Standards - manufactured in accordance with tested as per PTPS IEC 62722.

Accessories - Honeycomb, mounting brackets.



CODE	WATTAGE	LUMEN	SIZE mm
2148828	28W	3024lm	360 X 60 X 70H
2148830	30W	3240lm	660 X 60 X 70H
2148855	55W	5940lm	960 X 60 X 70H
2148870	70W	7560lm	1000 X 60 X 70H
2148890	90W	9720lm	1000 X 60 X 70H

LED	ENERGY STAR	ECO	DIFFERENT LENGTH
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C			
IP 66	IK 09	UGR <21	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	SMD	CRI >90	
ROHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++	DC 24V	85-265V	50/60Hz

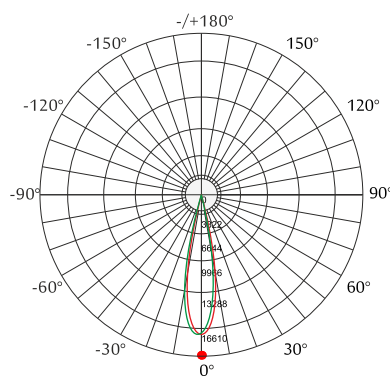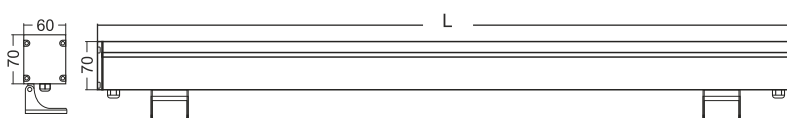

RGB
2700K
3000K
4000K
5000K
6000K



LED Drivers - PHILIPS GTI MEAN WELL TDCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.