

Objective

Chose Bolla LED in-ground luminaire to decor your outdoors. A clean beam of energy-efficient LED light is available in a package characterized by easy maintenance. From die-cast aluminium body, this fixture is designed for years of corrosion-resistant use. Intended for installation in soil or gravel. The LED system provides very convenient quality / price report, as it is warranty of energy savings up to 90% compared to the old luminaires

Obiettivo

Scegli Bolla LED, la luminaria incassata a pavimento, per decorare i tuoi esterni. Un fascio pulito di luce LED ad alta efficienza è disponibile in un pacchetto caratterizzato da una facile manutenzione. Dal corpo in alluminio pressofuso, questo apparecchio è stato progettato per anni di utilizzo resistente alla corrosione. Destinato all'installazione in terra o ghiaia. Il sistema LED offre un rapporto qualità / prezzo molto conveniente, in quanto garantisce un risparmio energetico fino al 90% rispetto ai vecchi apparecchi.

Description

Housing - Made of high corrosion die cast aluminum with high corrosion stainless steel 316 trim cover sealed with silicon gasket rubber.


Diffuser - Tempered Glass diffuser specially for LED with asymmetric glass coating as option for wall-grace application.

Reflector - Anodized aluminium reflector.










LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

Accessories- Recessed PVC box, honeycomb.

CODE	WATTAGE	LUMEN	SIZE mm	
1107706	6W	660lm	Ø110 X 96 H	Ø96
1107708	8W	880lm	Ø130 X 115 H	Ø118
1107712	12W	1320lm	Ø150 X 118 H	Ø140



		
PHASE DIMMING	DALI	1-10 DIMMING
	Glowing Wire Test - 850°	
IP 67	IK 09	UGR <21
	EAC	COMPLIANCE LM-79 TM-21 TM-80
PASEL ACCREDITATION	COB	CRI >90
	SELV	series wiring
		
A++	DC 24V	85-265V 50/60Hz

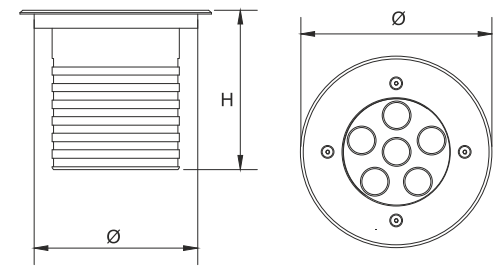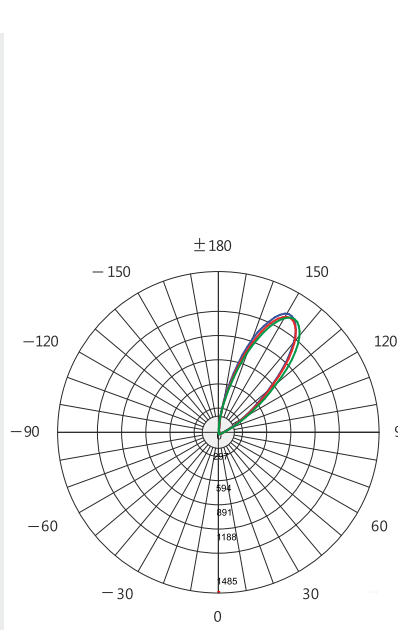


1000 KG LOAD

Honeycomb

10X25° 15X36°

2700K
3000K
4000K
5000K
6000K



LED Drivers - PHILIPS    TRIDONIC | LED Chips - BRIDGELUX    PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.