

**Objective**

Circular shape for an item class looking cast aluminium heat sink and body, the aluminium reflector and the clear glass diffuser, guarantees more than satisfying results in a matter of quality and luminous effect. The energy saving and the reasonable price are just two reason more to choose an item which is pure functionality. The extreme attention to every detail in the powder coating finishing is the final touch of beauty and reliability

**Obiettivo**

Forma quadrata o circolare per un articolo dall'aspetto di classe .La tecnologia LED, supportata dal corpo ed il dissipatore in alluminio pressofuso, il riflettore in alluminio ed il diffusore in vetro trasparente, garantisce più che soddisfacenti risultati in campo di qualità e effetto illuminotecnico .Il risparmio energetico e il prezzo ragionevole sono solamente due ragioni in più per scegliere un prodotto che è pura funzionalità. L'estrema attenzione ad ogni dettaglio nella verniciatura a polvere è il tocco finale di bellezza ed affidabilità .

**Description**


**Housing** - Die cast aluminium solvent free powder coated with choice of RAL colors

**Diffuser** - Tempered clear or frosted glass.















**Reflector** - Tiles pattern reflector made by highly specular anodized aluminium


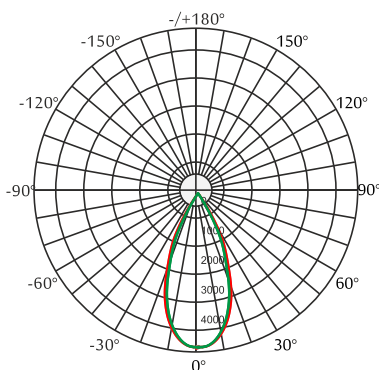
**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



**Standards** - manufactured in accordance with tested as per PTPS IEC 62722

CODE	WATTAGE	LUMEN	SIZE mm	
5093107	7W	721lm	Ø85 X 68 H	Ø75
5093112	12W	1236lm	Ø100 X 87 H	Ø85
5093120	20W	2060lm	Ø140 X 105 H	Ø120
5093130	30W	3090lm	Ø175 X 115 H	Ø145



			
<b>PHASE DIMMING</b>	<b>DALI</b>	<b>1-10 DIMMING</b>	
	<b>55°C</b>	<b>Glowing Wire Test - 850°</b>	
<b>IP 54</b>		<b>UGR &lt;19</b>	<b>SDCM 2.0/3.0</b>
	<b>EAC</b>	<b>COMPLIANCE</b>	
<b>PASEL ACCREDITATION</b>	<b>COB</b>	<b>CRI &gt;90</b>	
	<b>SELV</b>	<b>series wiring</b>	
			
<b>A++</b>	<b>85~265V 50/60Hz</b>		



	2700K	
	3000K	
	4000K	
	5000K	
	6000K	
	6500K	

LED Drivers - PHILIPS    TRIDONIC  BRIDGELUX  SHARP  PHILIPS 

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.