

Objective

The linear light ideal to make all your facades very fashion and bright wide wall grazing effect. The LED source, warranting high performances in lumen rates and light quality, saves considerable energy, so the item has "green" features. As light quality we mean uniform, bright and warm light, which has to be also comfortable and pleasant, respecting the human eye needs: all this is possible thanks to the low glare rating provided in this item. The long working lifespan is guaranteed from the quality of LED and the raw materials.

Obiettivo

La luce lineare ideale per rendere tutte le vostre facciate molto alla moda e l'effetto luminoso radente delle pareti larghe. La sorgente LED, che garantisce elevate prestazioni in termini di lumen rate e qualità della luce, consente di risparmiare energia considerevole, quindi l'elemento ha caratteristiche "verdi". Per qualità della luce intendiamo luce uniforme, luminosa e calda, che deve essere anche confortevole e piacevole, rispettando le esigenze dell'occhio umano: tutto ciò è possibile grazie al basso livello di abbagliamento fornito in questo articolo. La lunga durata è garantita dalla qualità del LED e delle materie prime.

Description

Housing - Extruded aluminium profile powder coated with choice of RAL colors.

Diffuser - Tempered transparent glass with optical glass lens.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.





Standards - manufactured in accordance with tested as per PTPS IEC 62722.

Accessories - Mounting bracket, honeycomb, cowl.

CODE	WATTAGE	LUMEN	SIZE mm
2150508	8W	960lm	262 X 32 X 61.5H
2150512	12W	1440lm	508 X 32 X 61.5H
2150518	18W	2160lm	754 X 32 X 61.5H
2150522	22W	2640lm	1000 X 32 X 61.5H



LED	ENERGY STAR	ECO	DIFFERENT LENGTH
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C			
IP 66	IK 07	UGR <21	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	SMD	CRI >90	
SELV	F	series wiring	
RoHS			
CE	COMPLIANCE		
A++	DC 24V		

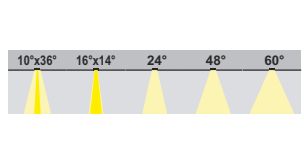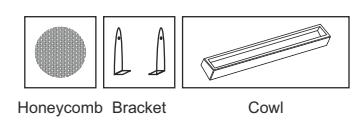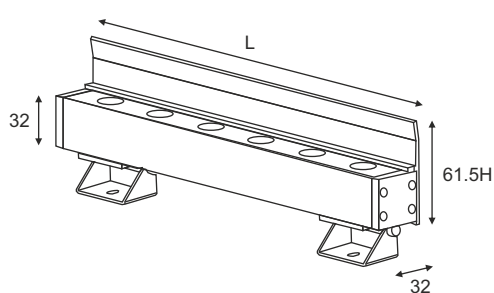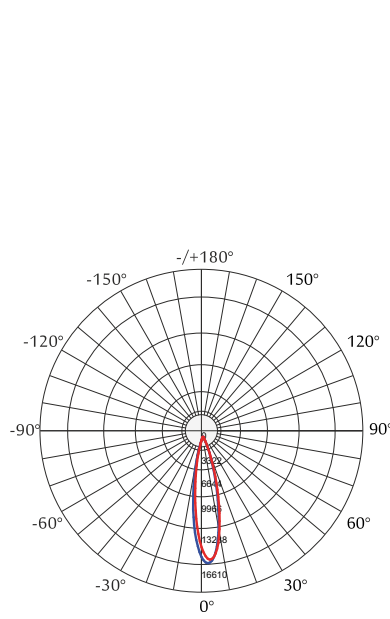

RGB
2700K
3000K
4000K
5000K
6000K



LED Drivers - PHILIPS GTI | MWM | GTCI TRIDONIC | LED Chips - BRIDGELUX | CREE | SHARP | SAMSUNG | PHILIPS | CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.