

Objective

The panel light is one of the most popular luminaire for commercial lighting, with continuous modification of its design, light efficiency, CRI and UGR level, smart function. We try always to be capable of satisfying the requirements providing for our customers helpful and valid solutions. Here our reply is I-Board, suitable for the recessed installation in classic or modular ceiling, with fitting options for gypsum ceilings. The main applications are in shops and offices

Obiettivo

Il pannello è uno dei più popolari e richiesti tipi di luminaria per l'illuminazione commerciale, con continue modifiche del design, dell'efficienza luminosa richiesta, di valori CRI a UGR, delle funzioni "intelligenti". Noi proviamo sempre ad essere capaci di soddisfare i requisiti, provvedendo soluzioni utili per i nostri clienti. Qui la nostra risposta è Edge-Board, con il suo profilo estremamente sottile e l'aspetto senza contorni, anche adattabile a diversi generi di installazione. I principali impieghi sono in negozi ed uffici.

Description

Housing - Extruded Aluminum frame powder coated with different RAL color option.

Diffuser - Opal PMMA low UGR diffusing sheet.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722



Mounting Methods - Dampa aluminum ceiling, lay in, suspended, recessed clips.

Accessories - Pushing Frame for aluminum grid ceiling, suspension kit, clips.

| CODE | WATTAGE | LUMEN | SIZE mm |
|---------|---------|--------|------------------|
| 9535530 | 30W | 3300lm | 295 X 595 X 10H |
| 9535535 | 35W | 3850lm | 295 X 1195 X 10H |
| 9535536 | 36W | 3960lm | 595 X 595 X 10H |
| 9535540 | 40W | 4400lm | 595 X 595 X 10H |
| 9535544 | 44W | 4840lm | 595 X 595 X 10H |
| 9535548 | 48W | 5280lm | 595 X 595 X 10H |



| | | | |
|---------------------|--------------|--------------------------------|---------------|
| LED | EMERSON | ECO | |
| PHASE DIMMING | DALI | 1-10 DIMMING | |
| 55°C | Glowing Wire | Test - 850° | |
| -25°C | | | |
| IP 54 | IK 06 | UGR <19 | SDCM 2.0/3.0 |
| CIDET | EAC | COMPLIANCE LM-79 TM-21 (LF-80) | |
| PASEL ACCREDITATION | SMD | CRI >90 | |
| ROHS | SELV | F | series wiring |
| CE | COMPLIANCE | | U |
| A++ | 85-265V | 50/60Hz | |

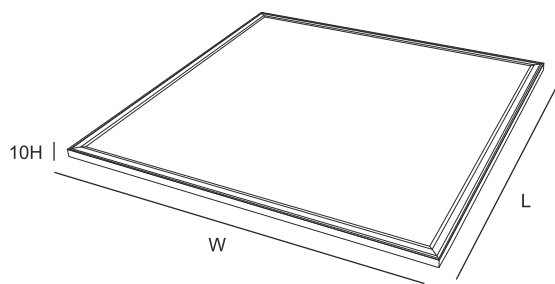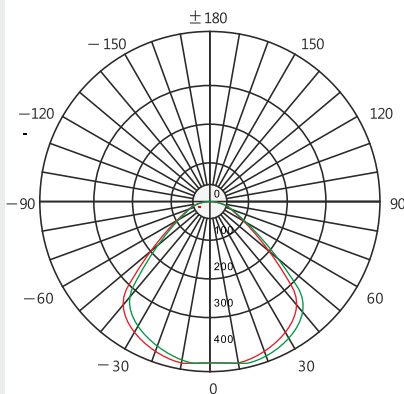

2700K
3000K
4000K
5000K
6000K
6500K

120°

LED Drivers - PHILIPS GTI, MEAN WELL, GTCI TRIDONIC, LED Chips - BRIDGELUX, CREE, SHARP, SAMSUNG, PHILIPS, CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.