

Objective

Industrial LED lights are the heavy-duty, super-bright alternative to traditional HID, tube, or strip light fixtures. Perfect for warehouse lighting, parking garage lighting, tunnel lighting, gym lighting, supermarket lighting, and more, this LED light source is highly efficient, delivering excellent lighting performances while saving energy, with also a life expectancy that's 5 times as long as old systems. The high quality die-cast aluminium housing and polycarbonate lens are weatherproof, dustproof, waterproof and impact resistant to permit the application in harsh environments with customizing beam angel options with no minimum qty. requirement.

Obiettivo

Le luci a LED industriali sono l'alternativa super-brillante e resistente alle tradizionali lampade HID, a tubi o a strisce. Perfetta per l'illuminazione di magazzini, illuminazione di garage, illuminazione di tunnel, illuminazione di palestre, illuminazione di supermercati e altro, questa sorgente di luce a LED è altamente efficiente, offre eccellenti prestazioni di illuminazione risparmiando energia, con una durata di vita pari a 5 volte quella dei vecchi sistemi. L'alloggiamento in alluminio pressofuso di alta qualità e la lente in policarbonato sono resistenti alle intemperie, alla polvere, all'acqua e agli urti per consentire l'applicazione in ambienti difficili.

Description

Housing - Die cast aluminium parts with extruded aluminium full gaged heat sink


Diffuser - Made of PMMA Polycarbonate shock proof optical lens specially for LED

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.




Standards - manufactured in accordance with EN 60598-1 and 60598-2-1

Accessories - Hanging chain, wall mounting bracket.

CODE	WATTAGE	LUMEN	SIZE mm
17036060	60W	7800lm	300 X 115 X 144 H
17036120	120W	15600lm	550 X 115 X 114 H
17036180	180W	23400lm	887 X 115 X 114 H
17036240	240W	31200lm	1060 X 115 X 114 H

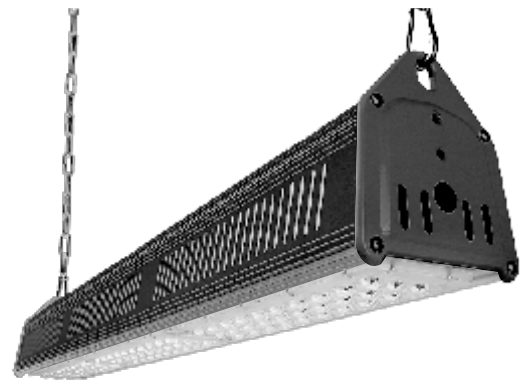

LED	EMERSON	ECO	
PHASE DIMMING	DALI	1-10 DIMMING	Different length
55°C	Glowing Wire	-25°C	Test - 850°
IP 65	IK 10	UGR <22	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE	LM-79 TM-21 LM-80
PASEL ACCREDITATION	HP SMD	CRI >90	
ROHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++	85-265V	50/60Hz	

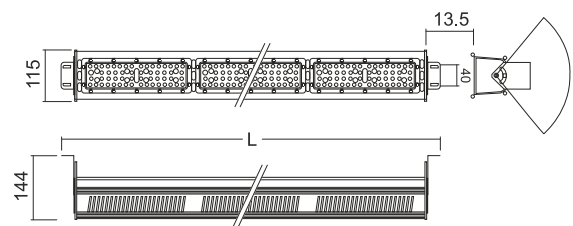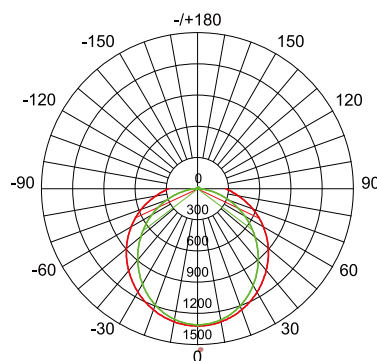

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K
- 6500K



LED Drivers - PHILIPS GTCI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.