

Objective

This product is a linear lighting fixture optimized for wall-washing applications, making every facade rich in style and technology. The very considerable energy saving with an easy installation and very low required maintenance in the whole long working lifespan are what make this item a more than intelligent choice. Low-profile aluminium housing and flexible mounting options allow discrete placement within a wide range of compact architectural details. The device offers superior illumination quality, thanks to the advanced technology of high efficiency LED light source.

Obiettivo

Questo prodotto è un apparecchio di illuminazione lineare ottimizzato per applicazioni wall-washing, rendendo ogni facciata ricca di stile e tecnologia. Il considerevole risparmio energetico con una facile installazione e una manutenzione richiesta molto bassa nell'intera durata della vita operativa sono ciò che rende questo articolo una scelta più che intelligente. L'alloggiamento in alluminio a basso profilo e le opzioni di montaggio flessibili consentono il posizionamento discreto in un'ampia gamma di dettagli architettonici compatti. Il dispositivo offre una qualità di illuminazione superiore, grazie alla tecnologia avanzata della sorgente luminosa a LED ad alta efficienza.

Description

Housing - Extruded aluminum casting profile powder coated with choice of RAL colors

Diffuser - Tempered clear or frosted glass with optical glass lense.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.





Standards - manufactured in accordance with tested as per PTPS IEC 62722.

Accessories - Mounting brackets.

CODE	WATTAGE	LUMEN	SIZE mm
2146112	12W	1500lm	498 X 44 X 70H
2146118	18W	2250m	498 X 44 X 70H
2146124	24W	3000lm	990 X 44 X 70H
2146136	36W	4500lm	990 X 44 X 70H
2146148	48W	6000lm	990 X 44 X 70H



LED	ENERGY STAR	ECO	DIFFERENT LENGTH
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C	IP 66	IK 08	UGR <21
			SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 LM-80	
PASEL ACCREDITATION	SMD	CRI >90	series wiring
ROHS	SELV	F	
CE	COMPLIANCE	RECYCLE	U
A++			DC 24V

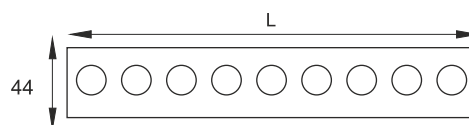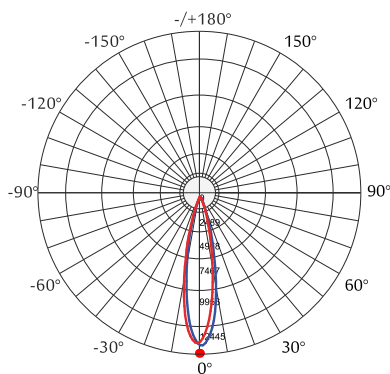

RGB
2700K
3000K
4000K
5000K
6000K



LED Drivers - PHILIPS GTI | GTCI TRIDONIC | LED Chips - BRIDGELUX, CREE, SHARP, SAMSUNG, PHILIPS, CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.