

**Objective**

This LED sports lights are an energy-efficient solution For large stadium, building lighting, area lighting, recreational sports lighting, accent lighting, parking lots. This item proposed from the experience of Roma Luce team is a warranty in a matter of lumen performances, energy saving, long working lifespan and stylish. The light source is a high efficiency and advanced technology LED system. The housing material is extruded aluminium with anti-corrosion and weatherproof features.

**Obiettivo**

Queste luci sportive a LED sono una soluzione ad alta efficienza energetica per grandi stadi, illuminazione di edifici, illuminazione di aree, illuminazione di sport ricreativi, illuminazione d'accento, parcheggi. Questo articolo proposto dall'esperienza del team di Roma Luce è una garanzia in termini di prestazioni del lume, risparmio energetico, durata della vita lunga ed elegante. La sorgente luminosa è un sistema LED ad alta efficienza e tecnologia avanzata. Il materiale della custodia è in alluminio estruso con caratteristiche anticorrosive e resistenti alle intemperie.

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.

High corrosion aluminium body with stainless steel screw in additional with rubber silicon gasket supplied.

**Diffuser** - Tempered clear glass diffuser specially for LED with optical PMMA Lens.

**LED** - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.


**Standards** - manufactured in accordance with EN 60598-1 and 60598-2-1


**Accessories** - (OTP) over temperature protection safety kit,

U bracket, Arm bracket, visor & gunsight.



CODE	WATTAGE	LUMEN	SIZE mm
21517600	600W	87000lm	400 x 431 x 583mm
215171200	1200W	174000lm	400 x 1080 x 700mm

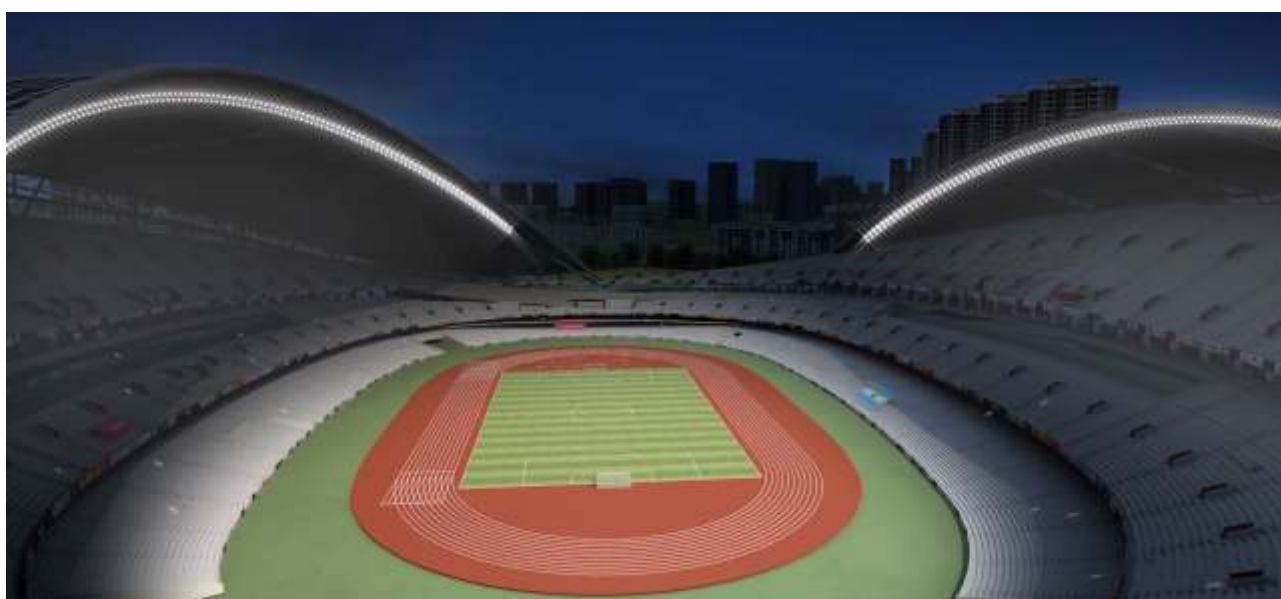


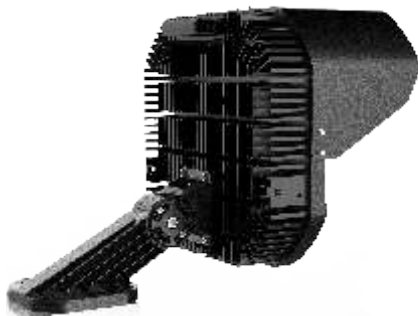


U bracket



Arm bracket






Visor as accessory



Gunsight as accessory

LED	ENERGY STAR	ECO	
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C			
IP 66	IK 08	UGR <21	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21	LM-80
PASEL ACCREDITATION	SMD	CRI >90	
RoHS	SELV	F	series wiring
CE	COMPLIANCE		U
A++	347V 415V 480V	85-265V 50/60Hz	

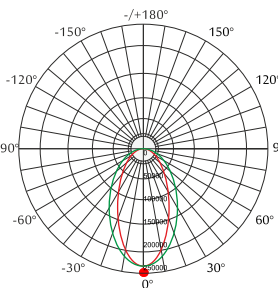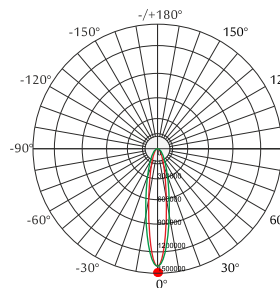

2700K  
3000K  
4000K  
5000K  
6000K



LED Drivers - PHILIPS **GTI** **MEAN WELL** **TRIDONIC**

LED Chips - BRIDGELUX **CREE** **PHILIPS**

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at [www.romaluce.it](http://www.romaluce.it) are the most recent versions and supercede all other printed or electronic versions.