

Objective

The luminaire luminous flux and the luminaire connected wattage quoted in the table may change as a result of technical progress. On our website you will find data sheets with information on each luminaire concerning not only the current values but also the LED service life and the luminous flux in relation to the respective colour temperature.

Obiettivo

Il flusso luminoso dell'apparecchio e la potenza collegata dell'apparecchio citati nella tabella possono variare a seguito del progresso tecnico. Sul nostro sito Web troverete schede tecniche con informazioni su ciascun apparecchio che riguardano non solo i valori attuali, ma anche la durata del LED e il flusso luminoso in relazione alla rispettiva temperatura del colore.

Description

Housing - Pure die cast aluminum body in anodized or powder coating finishes.

Diffuser - Opal polycarbonate PMMA.


LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with tested as per PTPS IEC 62722


Colors - Titanium anodized, Silver anodized, Black powder coated

White powder coated.

CODE	WATTAGE	LUMEN	SIZE mm
1622012	12W	1440lm	210 X 72 X 210 H
1622016	16W	1920lm	210 X 72 X 210 H

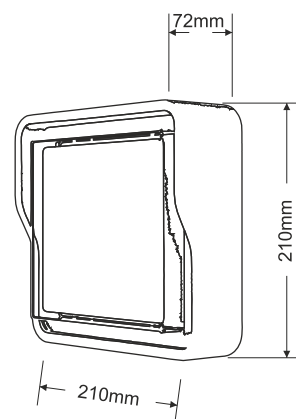

LED	ENERGY STAR	ECO
55°C	Glowing Wire Test - 850°	-25°C
IP 65	IK 08	UGR <21
		SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 (lm-80)
PASEL ACCREDITATION	SMD	CRI >90
ROHS	SELV	F series wiring
CE	COMPLIANCE	U
A++	185-265V	50/60Hz



3000K
4000K
6000K



LED Drivers - PHILIPS **GTI** **MEAN WELL** **ATCI TRIDONIC** LED Chips - BRIDGELUX **CREE** **SHARP** **SAMSUNG** **PHILIPS** **CITIZEN**

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.